


# GUK10N

GUK Universal combination terminal block

Download date : 2021-10-27

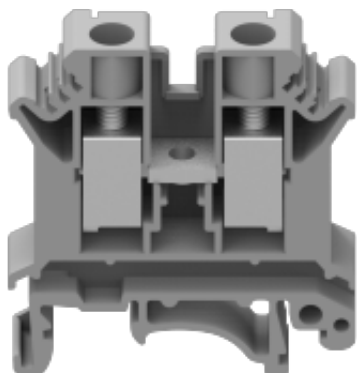

Electrical Diagram :



For reference only!version1.0

## CUL Technical Data (UL1059 )

Use Group	B	C	D
Rated Voltage [V]	600	600	600
Rated Current [A]	65	65	5
Withstanding Voltage	2200V/1Min		
Wire Range	20-6AWG		

## IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	800V
Rated Current [A]	57A
Impulse withstand voltage	8KV

## Conductor cross section

Soild	0.5-16mm <sup>2</sup>
Flexible	0.5-10mm <sup>2</sup>
Flexible with ferrule	0.5-6mm <sup>2</sup>


## Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated

## Other Data

Length/Height/Thickness [mm]	42.5/45.8/10.2
Connection Points	2
Stripping Length [mm]	10-11
Type of rail	DIN 35/32
Screw/Torque(Max)[N.m]	M4/1.5-1.8
Operating temperature [°C]	-40~+105


## Dimensions

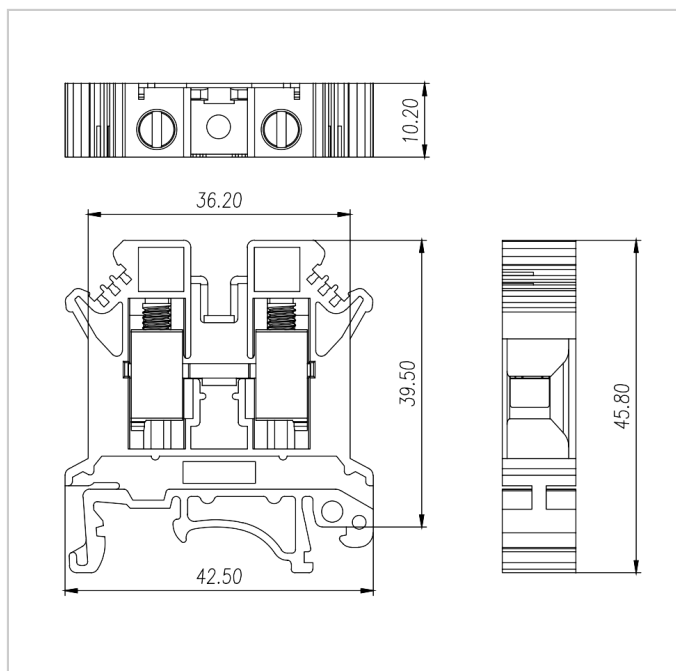


## Accessories




[FUKB10-XX](#)




[MUV10-10](#)




[EB-35](#)



[EW-35](#)



[DGS1-35x7.5Z-XXX](#)



[DGS1-35x7.5W-XXX](#)