


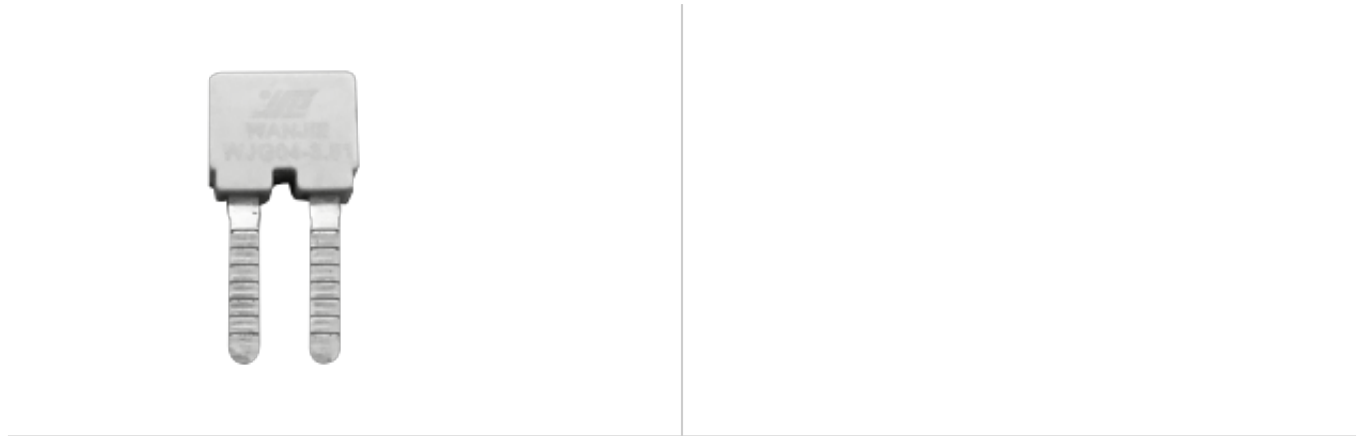

For reference only!version1.0

UL/CUL

Rated Current [A]	8
-------------------	---


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	3.81/2 , 3 , 4 , 6 , 7 , 9
Operating temperature [°C]	-40°C~+105°C

Dimensions



WJG04-3.81

PLUG-IN TERMINAL BLOCK

Download date : 2024-05-15

