


GUV2.5-302

GUV Push-in terminal block

Download date : 2024-05-16

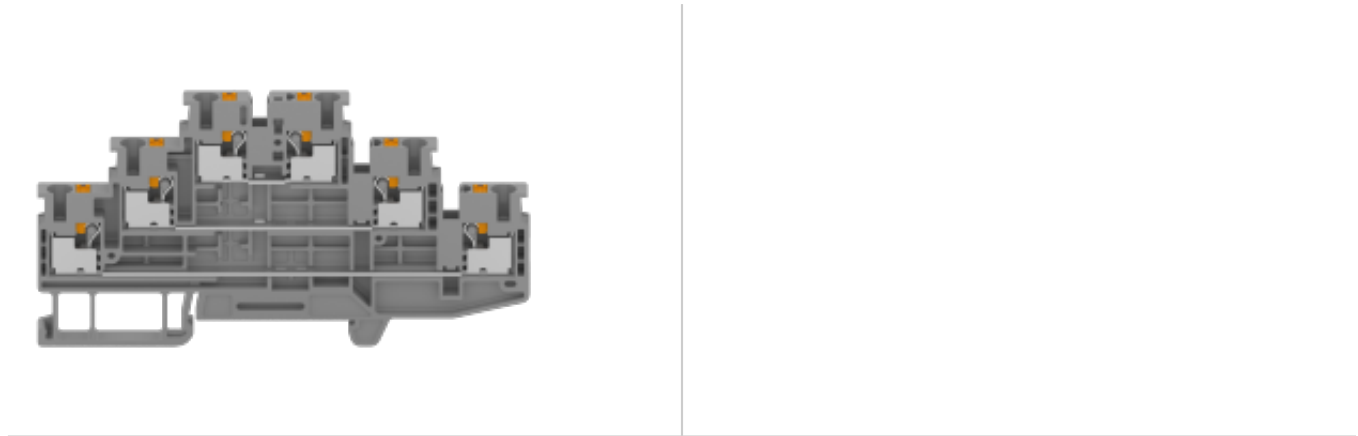

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	300	300	600
Rated Current [A]	20	20	5
Wire Range	26-12		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	500V
Rated Current [A]	20A
Impulse withstand voltage	6KV

Conductor cross section

Soild	0.2-4.0mm²
Flexible	0.2-2.5mm²
Flexible with ferrule	0.2-2.5mm²

Material

GUV2.5-302

GUV Push-in terminal block

Download date : 2024-05-16




Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	102.2/56.5/5.2
Stripping Length [mm]	8-10

Dimensions

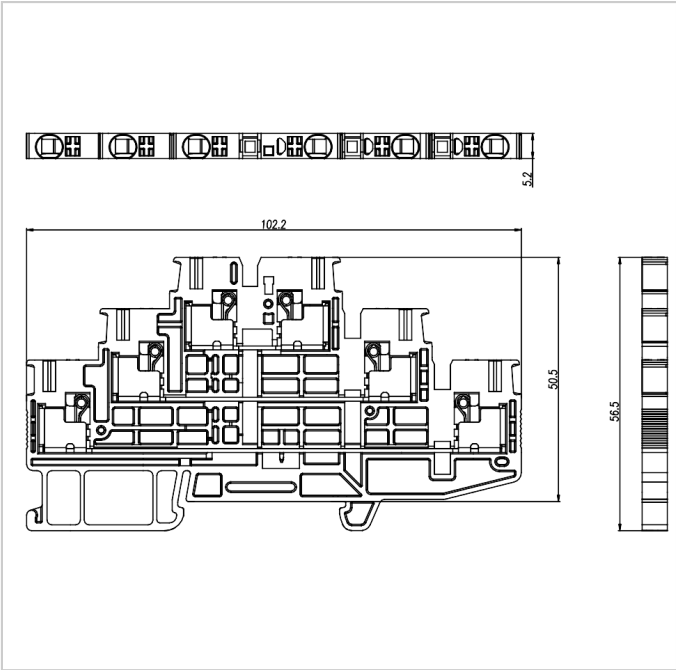


Accessories




[FUVA2.5-XX](#)




[DUV2.5-302](#)



[PUV2.5-96](#)



[EB-35](#)



[EW-35](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)