


GUS2.5-202

GUS Spring-cage terminal block

Download date : 2024-05-17

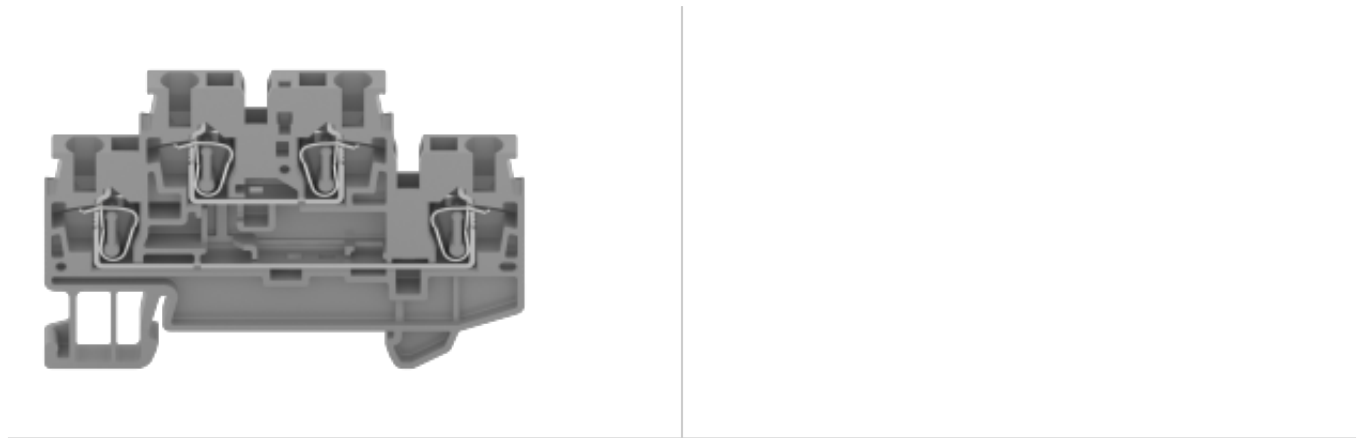

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	300	300	600
Rated Current [A]	20	20	5
Wire Range	26-12		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	500V
Rated Current [A]	22A
Impulse withstand voltage	6KV

Conductor cross section

Soild	0.2-4.0mm ²
Flexible	0.2-2.5mm ²
Flexible with ferrule	0.2-2.5mm ²

Material

GUS2.5-202

GUS Spring-cage terminal block

Download date : 2024-05-17




Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Length/Height/Thickness [mm]	67.7/46.0/5.2
Stripping Length [mm]	8-10


Dimensions

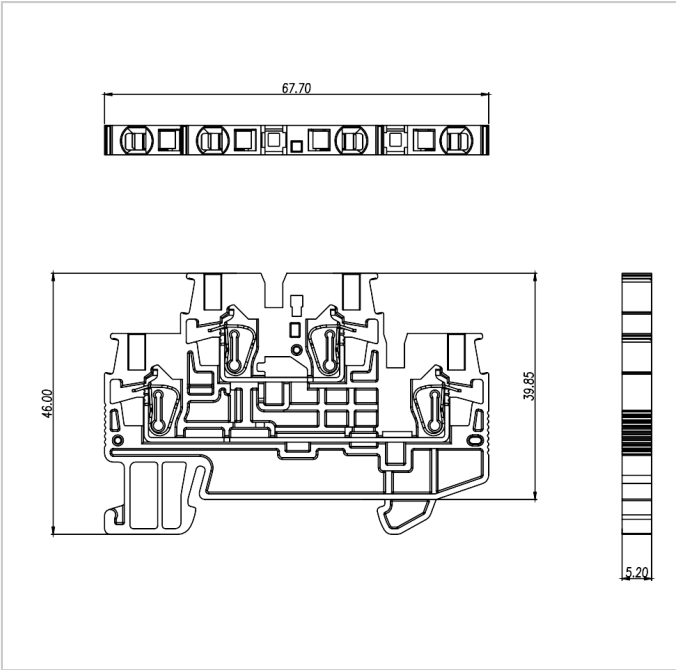


Accessories




[DUS2.5-202](#)




[PUV2.5-96](#)



[FUA2.5-XX](#)




[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)