



For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	10	-	10
Wire Range [AWG]	28-14		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	250	320	400
Rated Current [A]	17.5	17.5	17.5
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm²]	0.2-2.5		

Material


Insulation Material	PA66
Flame relardant rating	UL94V-0

Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	4.0/02-24
Stripping Length [mm]	6-7
Screw/Torque(Max)[N.m]	M2.5/0.45
Operating temperature [°C]	-40°C~+105°C
Soldering temperature	-
Pin dimensions [mm]	-
PCB Hole Diameter [mm]	-

Dimensions

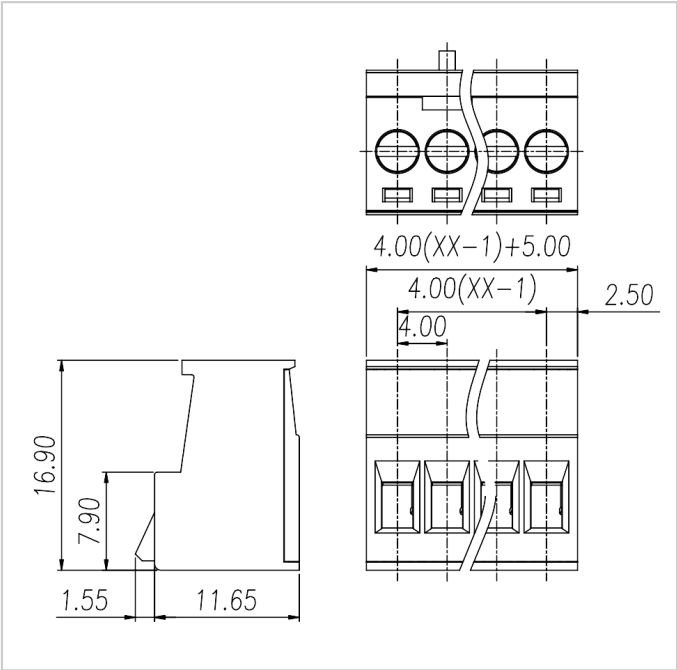

Accessories

WJ2EDGKJ-4.0

PLUG-IN TERMINAL BLOCK

Download date : 2024-05-16



[WJ2EDGJ-4.0](#)