




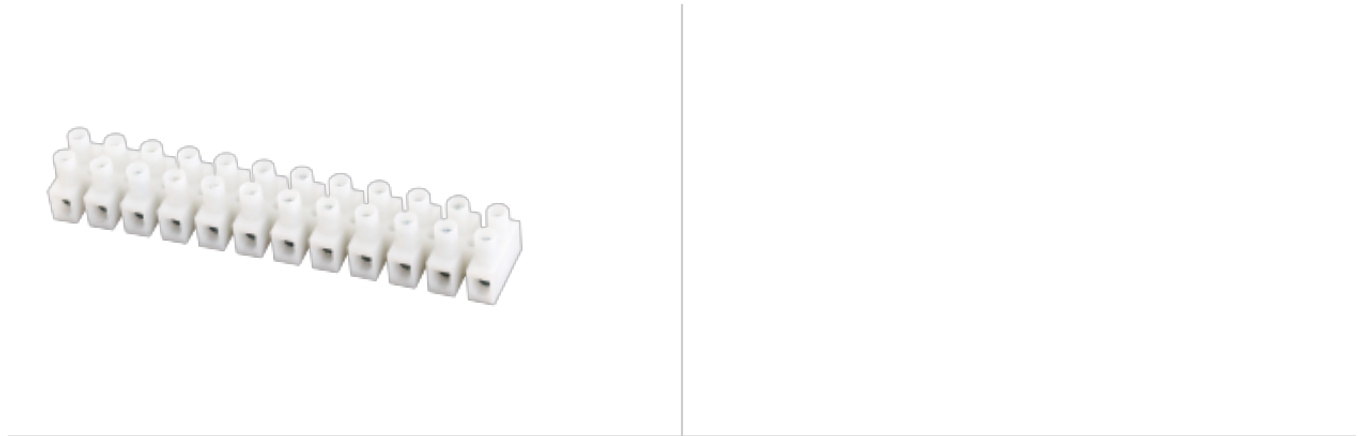

For reference only!version1.0

Material

Housing	PA66 , UL94V-2
Screws	M5 , Steel , Zn plated
Pressure line column	Copper alloy , Ni plated

Electrical

Standard	UL	IEC
Rated Voltage	600V	750V
Rated current	65A	76A
Wire range	20-6AWG	16mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2500V/1Min	
Temp.range	-40℃~+105℃	
Torque	1.5Nm/13Lb.in/15.3Kgf.cm	

Dimensions



MY16HW-1.2

FEED THROUGH TERMINAL BLOCK

Download date : 2024-04-29

