


WJ15EDGK-5.08
PLUG-IN TERMINAL BLOCK

Download date : 2024-05-08

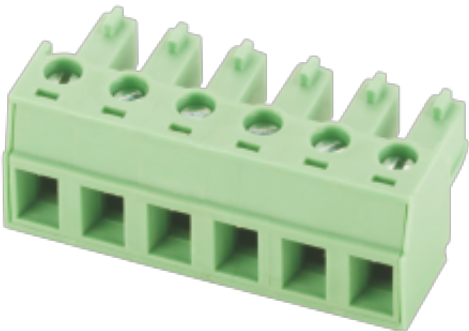

	PCB connector Rated current: 8 A Rated voltage: 300 V Wire range: 28-16 AWG Pitch: 5.08 mm
---	---

	For reference only!version1.0
---	-------------------------------

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	8	-	8
Wire Range [AWG]	28~16		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	250	320	630
Rated Current [A]	8	8	8
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm²]	0.2~1.5		

Material


Insulation Material	PA66
---------------------	------

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Pitch/Poles [mm]/[P]	5.08/2~24
Stripping Length [mm]	6-7
Screw/Torque(Max)[N.m]	M2/0.2
Operating temperature [°C]	-40~+105
Soldering temperature	/
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/

Dimensions

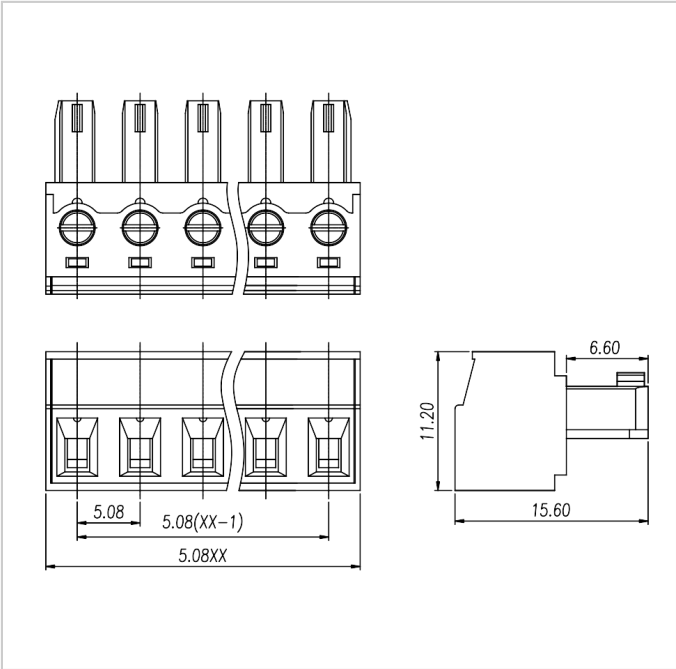

Accessories



[WJ15EDGVC-5.08](#)



[WJ15EDGRC-5.08](#)