




PCB connector  
Rated current: 15 A  
Rated voltage: 300 V  
Wire range: 28-12 AWG  
Pitch: 5.08 mm

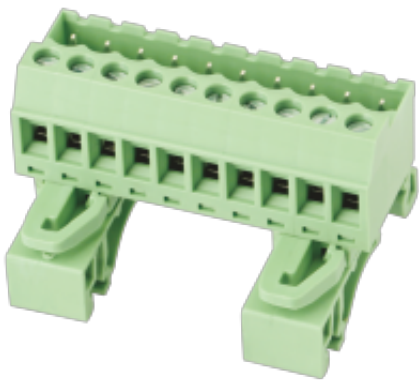

For reference only!version1.0

UL/CUL

| Use Group                    | B     | C | D   |
|------------------------------|-------|---|-----|
| Rate Voltage [V]             | 300   | - | 300 |
| Rated Current [A]            | 15    | - | 10  |
| Wire Range [AWG]             | 28-12 |   |     |
| Dielectric Voltage-Withstand | 1.6KV |   |     |

IEC

|                                               |         |     |     |
|-----------------------------------------------|---------|-----|-----|
| Overvoltage Category                          | III     | III | II  |
| Contamination Class                           | 3       | 2   | 2   |
| Rated Voltage [V]                             | 320     | 320 | 630 |
| Rated Current [A]                             | 12      | 12  | 12  |
| Impulse withstand voltage [KV]                | 4       | 4   | 4   |
| Conductor cross section[solid/flexible] [mm²] | 0.2-2.5 |     |     |

Material


|                     |      |
|---------------------|------|
| Insulation Material | PA66 |
|---------------------|------|

|                              |              |
|------------------------------|--------------|
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Data

|                            |           |
|----------------------------|-----------|
| Pitch/Poles [mm]/[P]       | 5.08/2-24 |
| Stripping Length [mm]      | 7-8       |
| Screw/Torque(Max)[N.m]     | M3/0.5    |
| Operating temperature [°C] | -40~+105  |
| Soldering temperature      | /         |
| Pin dimensions [mm]        | /         |
| PCB Hole Diameter [mm]     | /         |

Dimensions

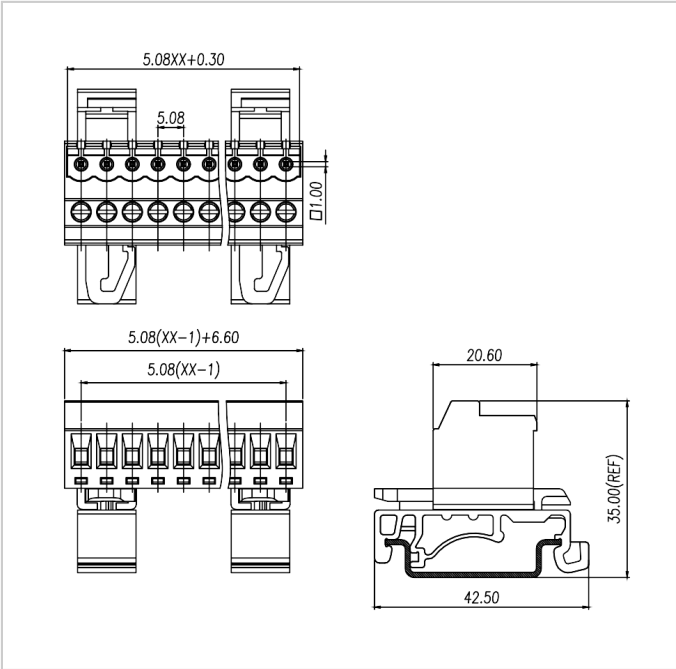

Accessories



[WJ2EDGK-5.0/5.08](#)



[WJ2EDGKA-5.0/5.08](#)



[WJ2EDGKB-5.0/5.08](#)




[WJ2EDGKC-5.0/5.08](#)




[WJ2EDGKD-5.0/5.08](#)



[WJ2EDGKDA-5.0/5.08](#)



[WJ2EDGKDB-5.0/5.08](#)



[WJ2EDGKDH-5.08](#)



[WJ2EDGKF-5.0](#)



[WJ2EDGKH-5.08](#)



[WJ2EDGKAH-5.08](#)




[WJ2EDGKZ-5.0/5.08](#)



[WJ2EDGKL-5.0/5.08](#)



[WJ2EDGA-5.0/5.08](#)



[WJ2EDGB-5.0/5.08](#)