

PCB connector
Rated current: 55 A
Rated voltage: 300 V
Pitch: 10.16 mm
Mounting: Wave soldering



For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	300	300
Rated Current [A]	55	55	10
Wire Range [AWG]	/		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	1000	1000	1000
Rated Current [A]	76	76	76
Impulse withstand voltage [KV]	8	8	6
Conductor cross section[solid/flexible] [mm²]	/		


Material

Insulation Material	PA66
---------------------	------

Other Data

Dimensions

PCB opening diagram

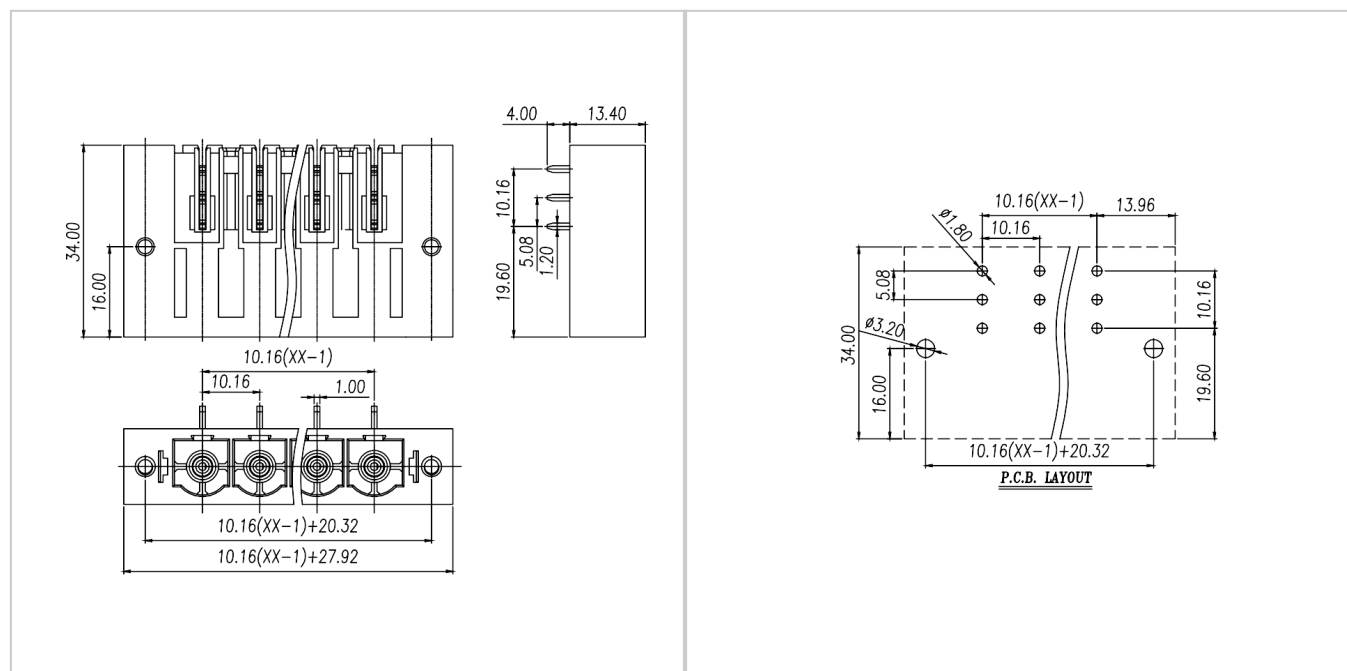

Accessories



[WJ3EDGKM-10.16](#)