



GUV2.5-102-PE

GUV Push-in terminal block

Download date : 2024-05-16

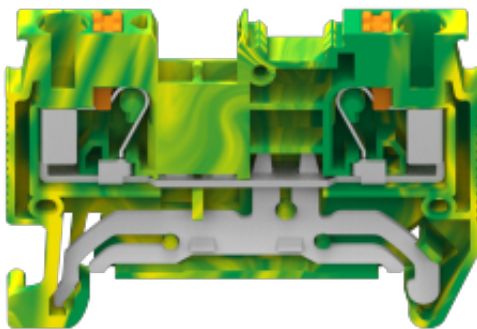

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059 )

|                      |            |
|----------------------|------------|
| Withstanding Voltage | 2200V/1Min |
| Wire Range           | 26-12AWG   |

IEC Technical Data (IEC 60947-7-2)

|                           |     |
|---------------------------|-----|
| Overvoltage Category      | III |
| Contamination Class       | 3   |
| Impulse withstand voltage | 8KV |

Conductor cross section


|                       |            |
|-----------------------|------------|
| Soild                 | 0.2-4mm²   |
| Flexible              | 0.2-2.5mm² |
| Flexible with ferrule | 0.2-2.5mm² |

Material


|                        |              |
|------------------------|--------------|
| Insulation Material    | PA66         |
| Flame relardant rating | UL94V-0      |
| Conductor Material     | Copper alloy |

|                              |               |
|------------------------------|---------------|
| Plating of conductor surface | Sn plated     |
| Other Data                   |               |
| Length/Height/Thickness [mm] | 48.6/35.2/5.2 |
| Connection Points            | 2             |
| Stripping Length [mm]        | 8-10          |
| Type of rail                 | DIN 35        |
| Screw/Torque(Max)[N.m]       | /             |
| Operating temperature [°C]   | -40~+105      |


Dimensions

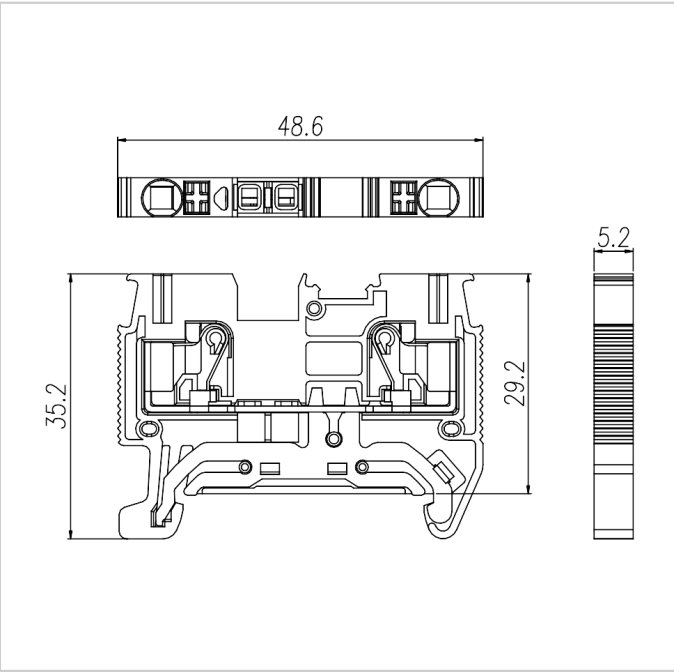


Accessories



[MUV2.5-10](#)




[PUV2.5-96](#)



[FUVA2.5-XX](#)



[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[DUV2.5-102](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)