


GWS2.5J

GWS Cage clamp terminal block

Download date : 2024-05-04

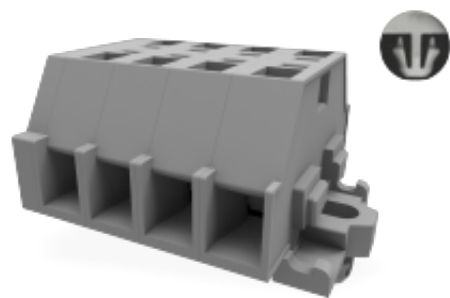

For reference only!version1.0

UL/CUL

|                              |       |     |     |
|------------------------------|-------|-----|-----|
| Use Group                    | B     | C   | D   |
| Rate Voltage [V]             | 300   | 300 | 600 |
| Rated Current [A]            | 15    | 15  | 5   |
| Wire Range [AWG]             | 28-14 |     |     |
| Dielectric Voltage-Withstand | 1.6KV |     |     |

IEC

|                                               |         |     |    |
|-----------------------------------------------|---------|-----|----|
| Overvoltage Category                          | III     | III | II |
| Contamination Class                           | 3       | 2   | 2  |
| Rated Voltage [V]                             | 500     | -   | -  |
| Rated Current [A]                             | 24      | -   | -  |
| Impulse withstand voltage [KV]                | 6       | -   | -  |
| Conductor cross section[solid/flexible] [mm²] | 0.2-2.5 |     |    |

Material

|                        |         |
|------------------------|---------|
| Insulation Material    | PA66    |
| Flame relardant rating | UL94V-0 |

GWS2.5J

GWS Cage clamp terminal block

Download date : 2024-05-04



|                              |              |
|------------------------------|--------------|
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Data

|                            |          |
|----------------------------|----------|
| Pitch/Poles [mm]/[P]       | 6.0/2-24 |
| Stripping Length [mm]      | 8-9      |
| Screw/Torque(Max)[N.m]     | /        |
| Operating temperature [°C] | -40~+105 |
| Soldering temperature      | /        |
| Pin dimensions [mm]        | /        |
| PCB Hole Diameter [mm]     | /        |

Dimensions

