


WJ15EDGVHSM-THR-2.54

插拔式接线端子

下载日期:2024-05-17

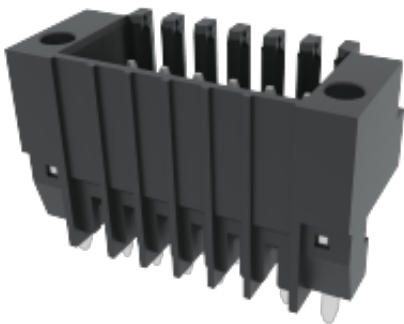

插拔式连接器

额定电流: 5 A

额定电压: 150 V

间距: 2.54 mm

安装: 回流焊



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range [AWG]	-		
耐电压 Dielectric Voltage-Withstand	1.3KV		

技术参数-IEC

过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	80	160	320
额定电流 Rated Current [A]	6	6	6
额定冲击电压 Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积[硬/柔] Conductor cross section [mm²]	-		

材料 Material

绝缘材料 Insulation Material	LCP
--------------------------	-----

WJ15EDGVHSM-THR-2.54

插拔式接线端子

下载日期:2024-05-17



WJ15EDGKNHBM-2.54



WJ15EDGKNHBG-2.54