


WJ212V-THR-5.0/5.08

弹簧式PCB接线端子

下载日期:2024-05-04

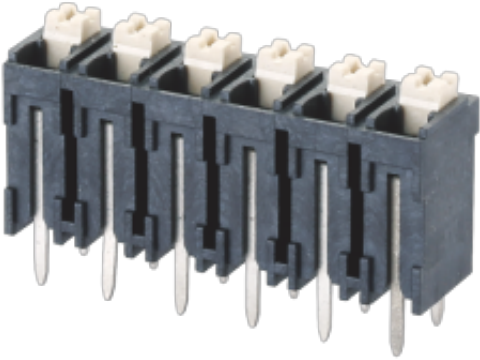

	弹簧式PCB连接器 额定电流: 10 A 额定电压: 300 V 使用线径: 24-16 AWG 间距: 5.0 mm/5.08mm 安装: 回流焊
---	--

	目录仅供参考，实际规格依产品工程图为准 版本1.0
---	---------------------------

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range [AWG]	24~16		
耐电压 Dielectric Voltage-Withstand	1.6KV		

技术参数-IEC

过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	250	320	500
额定电流 Rated Current [A]	17.5	17.5	17.5
额定冲击电压 Impulse withstand voltage [KV]	4	4	4
导线截面积[硬/柔] Conductor cross section [mm²]	0.2~1.5		

材料 Material

--	--

