


WJ0601/0701-01XX

MCS多用途连接器

下载日期:2024-04-28

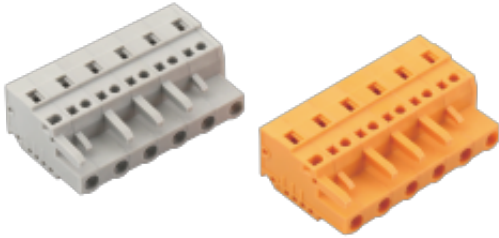

	MCS 多用途连接器 额定电流: 15 A 额定电压: 300 V 使用线径: 28-12 AWG 间距: 7.5 mm/7.62 mm
---	---

	目录仅供参考，实际规格依产品工程图为准 版本1.0
---	---------------------------

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range [AWG]	28-12		
耐电压 Dielectric Voltage-Withstand	1.6KV		

技术参数-IEC

过电压类别 Overvoltage Category	III	III	II
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	320	320	630
额定电流 Rated Current [A]	16	16	16
额定冲击电压 Impulse withstand voltage [KV]	6	6	6
导线截面积[硬/柔] Conductor cross section [mm²]	0.25-2.5		

材料 Material

绝缘材料 Insulation Material	PA66
--------------------------	------

WJ0601/0701-01XX

MCS多用途连接器

下载日期:2024-04-28




阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数 Pitch/Poles [mm]/[P]	7.5 , 7.62/2-24
剥线长度 Stripping Length [mm]	8-9
螺丝/扭矩 Screw/Torque(Max)[N.m]	/
工作温度 Operating temperature [°C]	-40~+105
焊锡温度 Soldering temperature	/
引针尺寸 Pin dimensions [mm]	/
PCB板孔径 PCB Hole Diameter [mm]	/

尺寸图

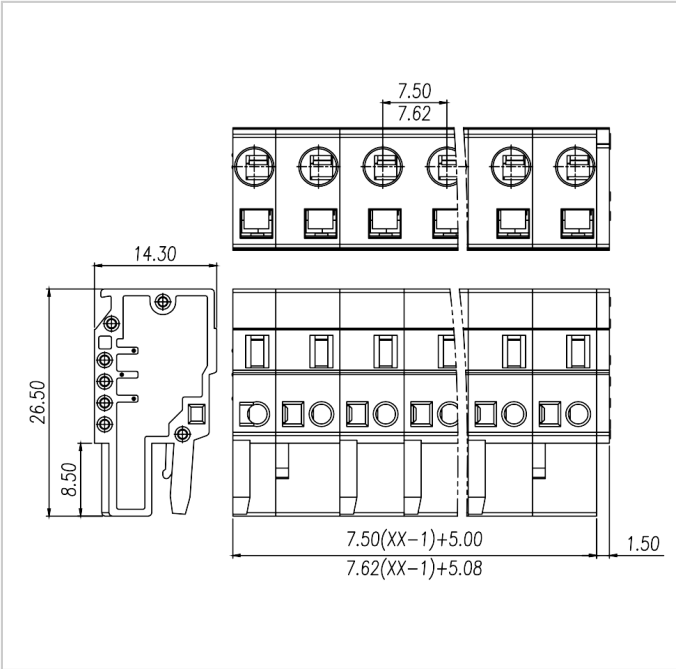

配件

WJ0601/0701-01XX

MCS多用途连接器

下载日期:2024-04-28



WJ0602/0702-01XX

WJ0602/0702-02XX

WJ0602/0702-03XX



WJ0602/0702-04XX

WJ0603/0703-01XX

WJ0603/0703-02XX



WJ0603/0703-03XX