

WJ2EDGRM-5.0/5.08

插拔式接线端子

下载日期:2024-05-09



|                                                                                   |                                                                                             |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|  | <p>插拔式连接器</p> <p>额定电流: 15 A</p> <p>额定电压: 300 V</p> <p>间距: 5.0 mm/5.08 mm</p> <p>安装: 波峰焊</p> |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|

|                                                                                   |                           |
|-----------------------------------------------------------------------------------|---------------------------|
|  | 目录仅供参考，实际规格依产品工程图为准 版本1.0 |
|-----------------------------------------------------------------------------------|---------------------------|

技术数据-UL/CUL

|                                  |       |   |     |
|----------------------------------|-------|---|-----|
| 等级 Use Group                     | B     | C | D   |
| 额定电压 Rate Voltage [V]            | 300   | - | 300 |
| 额定电流 Rated Current [A]           | 15    | - | 10  |
| 接线范围 Wire Range [AWG]            | /     |   |     |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV |   |     |

技术参数-IEC

|                                          |     |     |     |
|------------------------------------------|-----|-----|-----|
| 过电压类别 Overvoltage Category               | III | III | II  |
| 污染等级 Contamination Class                 | 3   | 2   | 2   |
| 额定电压 Rated Voltage [V]                   | 250 | 320 | 630 |
| 额定电流 Rated Current [A]                   | 15  | 15  | 15  |
| 额定冲击电压 Impulse withstand voltage [KV]    | 4   | 4   | 4   |
| 导线截面积[硬/柔] Conductor cross section [mm²] | /   |     |     |

材料 Material

|                          |      |
|--------------------------|------|
| 绝缘材料 Insulation Material | PA66 |
|--------------------------|------|

WJ2EDGRM-5.0/5.08

插拔式接线端子

下载日期:2024-05-09




|                                     |              |
|-------------------------------------|--------------|
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |

一般参数 Other Data

|                                 |                 |
|---------------------------------|-----------------|
| 间距/极数 Pitch/Poles [mm]/[P]      | 5.0 , 5.08/2-24 |
| 剥线长度 Stripping Length [mm]      | /               |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]    | /               |
| 工作温度 Operating temperature [°C] | -40~+105        |
| 焊锡温度 Soldering temperature      | 260°C/5S        |
| 引针尺寸 Pin dimensions [mm]        | 1.0*1.0         |
| PCB板孔径 PCB Hole Diameter [mm]   | □1.7            |

尺寸图

PCB开孔图

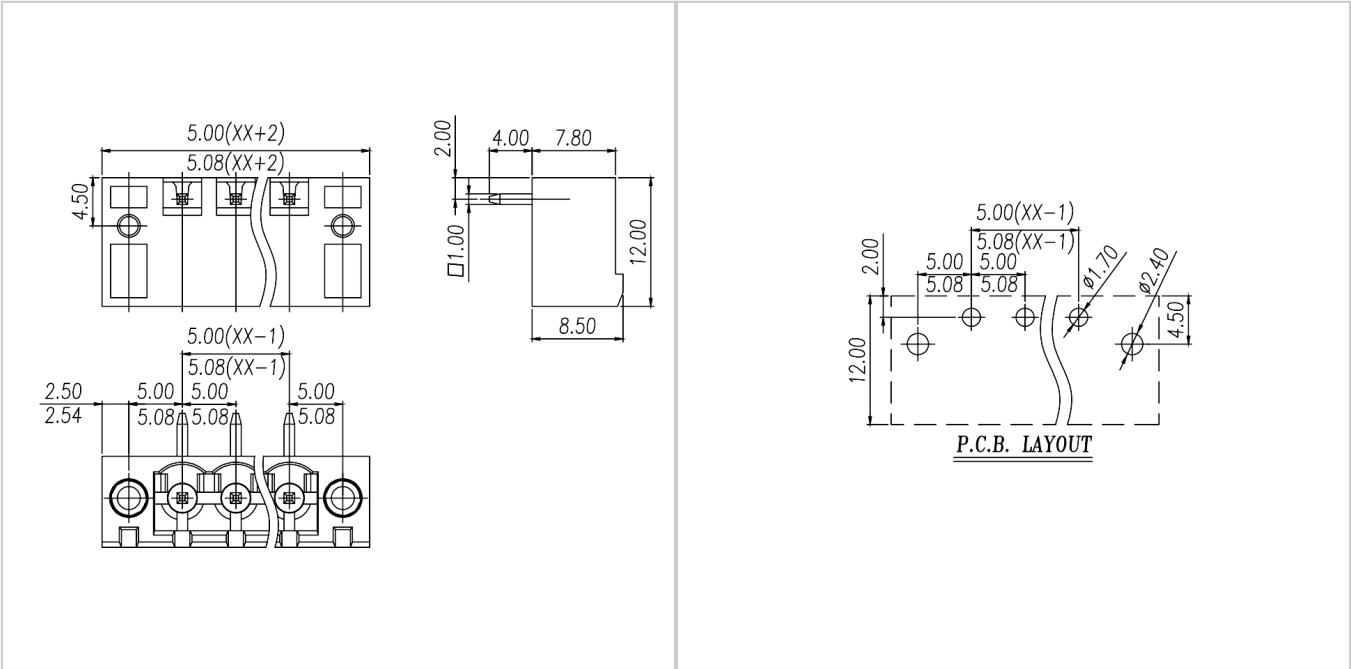

配件

## WJ2EDGRM-5.0/5.08

插拔式接线端子

下载日期:2024-05-09



WJ2EDGKM-5.0/5.08



WJ2EDGKAM-5.0/5.08




WJ2EDGKBM-5.0/5.08



WJ2EDGKCM-5.0/5.08



WJ2EDGKDM-5.0/5.08



WJ2EDGKDBM-5.0/5.08



WJ2EDGKDBM-5.0/5.08



WJ2EDGKDHM-5.08




WJ2EDGKHM-5.08



WJ2EDGKAHM-5.08



WJ2EDGKZM-5.0/5.08



WJ2EDGKLM-5.0/5.08