

M12 Female Molded Terminator

M12 Circular Connector

Download date : 2025-10-19



Connector Series : M12
Gender : Female
Coding : A,B,C,D
Locking Type : Fix Screw
Mounting Type : Straight
Part No : M12-X**-ST0-F02-BMT
X:A,B,C,D Coding
**:03,04,05...(Pin)
MT=Molded Terminator



For reference only!version1.0

Technical Data

Standard	IEC61076-2-101
Ambient Temperatur	-25°C~+90°C
Insulation Resistance	$\geq 100M\Omega$
Contact Resistance	$\leq 10m\Omega$
IP Class	IP67
Mating Endurance	>100 Mating Cycles

Material Data

Connector Carriers	PA
Connector Contacts	Copper Alloy With Gold Plated 铜镀金
Connector Nut/Screw	Copper Alloy With Nickel Plated 铜镀镍
Seal/O-Ring	FKM 氟橡胶
Shielding	Unshielded 非屏蔽
Connector Overmold	TPU

Electrical Data & Mechanical Date

Contacts Pin	3/4Pins	5Pins	6/8Pins	12/17Pins
--------------	---------	-------	---------	-----------


M12 Female Molded Terminator
M12 Circular Connector

Download date : 2025-10-19



Rated Current	4A	4/2A (C-code)	2A	1.5A
Voltage AC/DC	250V	60V	30V	30V

Dimensions

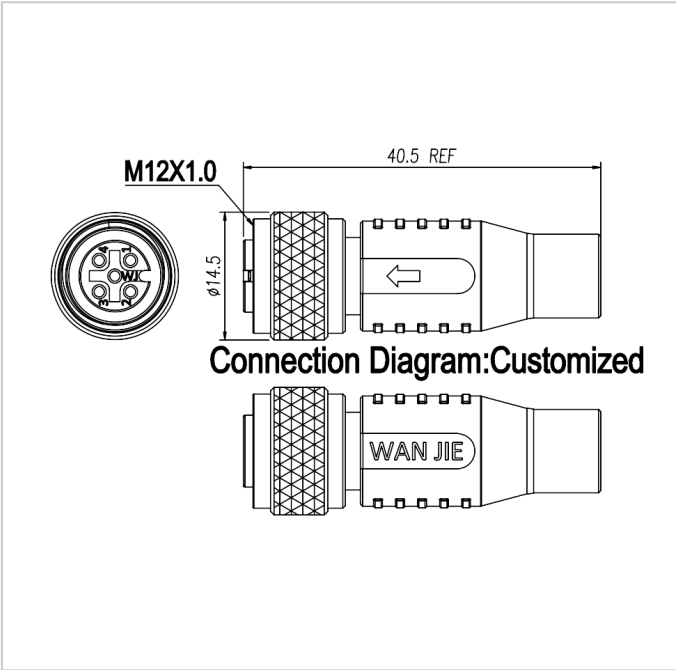

Specification Selection Table

M12 Female Molded Terminator
M12 Circular Connector

Download date : 2025-10-19



Contacts Pin数	Available Coding 防插错编码				Rated Current 额定电流	Voltage 电压		Part NO.产品编号
	A-Coding	B-Coding	C-Coding	D-Coding		AC	DC	
03Pins					4A	250V	250V	M12-A03-ST0-F02-BMT M12-B03-ST0-F02-BMT M12-C03-ST0-F02-BMT
04Pins					4A	250V	250V	M12-A04-ST0-F02-BMT M12-B04-ST0-F02-BMT M12-C04-ST0-F02-BMT M12-D04-ST0-F02-BMT
05Pins					4A 2A(C-code)	60V	60V	M12-A05-ST0-F02-BMT M12-B05-ST0-F02-BMT M12-C05-ST0-F02-BMT
06Pins					2A	30V	30V	M12-C06-ST0-F02-BMT
08Pins					2A	30V	30V	M12-A08-ST0-F02-BMT
12Pins					1.5A	30V	30V	M12-A12-ST0-F02-BMT
17Pins					1.5A	30V	30V	M12-A17-ST0-F02-BMT