WJ0605/0705-04XX

MULTI-PURPOSE TERMINAL BLOCK

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range [AWG]		/	
Dielectric Voltage-Withstand		1.6KV	

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	320	320	630
Rated Current [A]	12	12	10
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm²]		/	

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0

Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	7.5 , 7.62/2-24
Stripping Length [mm]	/
Screw/Torque(Max)[N.m]	/
Operating temperature [℃]	-40~+105
Soldering temperature	260℃/5S
Pin dimensions [mm]	0.6*1.0
PCB Hole Diameter [mm]	Ø1.4

Dimensions

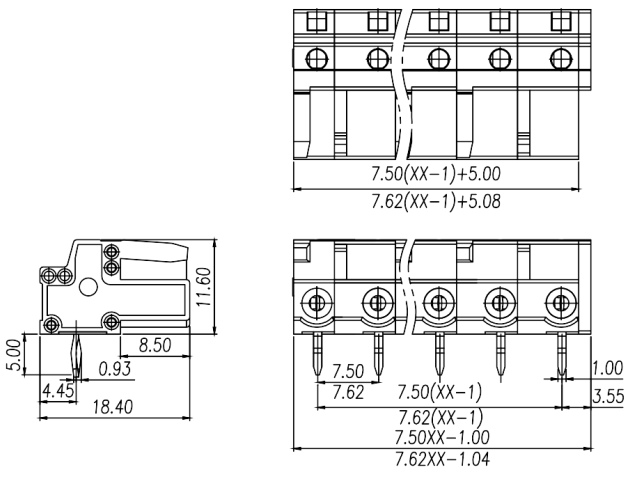

PCB opening diagram



Accessories



WJ0602/0702-05XX



WJ0602/0702-06XX



WJ0602/0702-07XX



WJ0602/0702-08XX

WJ0603/0703-04XX



WJ0603/0703-05XX

WJ0603/0703-06XX