

M5 Female Molded Cables, Angled

M5 Circular Connector

Download date : 2025-10-28



Connector Series : M5

Gender : Female

Coding : A

Locking Type : Fix Screw

Mounting Type: Angled

Part No : M05-A**-RA0-F02-BC*-XXX

A:A Coding

** : 03, 04 (Pin)

RA0:0=Unshielded , 2=Full
Shield , 1=Ground

BC*: BCC=Cable Jacket PVC(For
Molded Cable)

BC*: BCR=Cable Jacket PUR(For
Molded Cable)

XXX:050=0.5M, 100=1M,
10M=10M...(Length)



For reference only!version1.0

Technical Data

Standard	IEC61076-2-105
Ambient Temperatur	-25°C~+80°C
Insulation Resistance	$\geq 100M\Omega$
Contact Resistance	$\leq 5m\Omega$
IP Class	IP67
Mating Endurance	>100 Mating Cycles

M5 Female Molded Cables, Angled
M5 Circular Connector

Download date : 2025-10-28




Material Data

Connector Carriers	PA
Connector Contacts	Copper Alloy With Gold Plated 铜镀金
Connector Nut/Screw	Copper Alloy With Nickel Plated 铜镀镍
Seal/O-Ring	FKM 氟橡胶
Shielding	Shielded 屏蔽/Unshielded 非屏蔽
Connector Overmold	TPU

Electrical Data & Mechanical Date

Contacts Pin	3Pins	4Pins
Rated Current	1A	1A
Voltage AC/DC	60V/60V	60V/60V
Wire Range AWG/mm²	26/0.14	26/0.14
Cable Jacket	PUR/PVC	

Dimensions

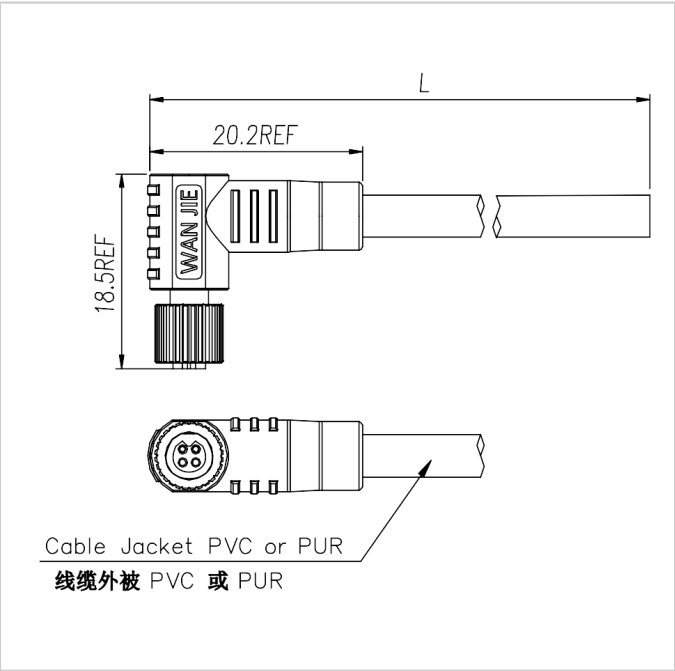

M5 Female Molded Cables, Angled
M5 Circular Connector

Download date : 2025-10-28



Specification Selection Table

Contacts Pin数	Available Coding 防插错编码	Rated Current 额定电流	Voltage 电压		Wire Range 接线范围		Cable Jacket 线缆外被	Part NO. 产品编号
			AC	DC	AWG	mm²		
03Pins	 A-Coding	1A	60V	60V	26	0.14	PVC	M05-A03-RA*-F02-BCC-XXX
							PUR	M05-A03-RA*-F02-BCR-XXX
04Pins	 A-Coding	1A	60V	60V	26	0.14	PVC	M05-A04-RA*-F02-BCC-XXX
							PUR	M05-A04-RA*-F02-BCR-XXX