


WJ950-9.5

PCB SCREW TERMINAL BLOCK

Download date : 2025-12-06

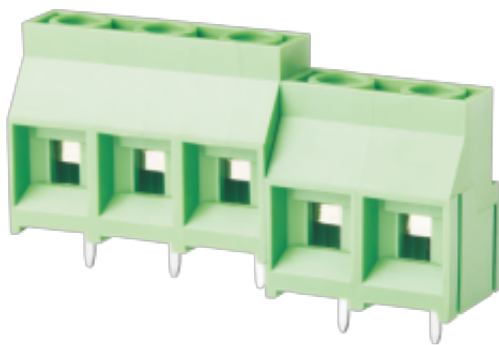

PCB terminal block
Rated current: 30 A
Rated voltage: 300 V
Wire range: 26-10 AWG
Pitch: 9.5 mm
Mounting: Wave soldering



For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	300	300
Rated Current [A]	30	30	30
Wire Range [AWG]	26~10		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	630	1000	1000
Rated Current [A]	32	32	32
Impulse withstand voltage [KV]	8	8	8
Conductor cross section[solid/flexible] [mm²]	0.5~4.0		

Material

WJ950-9.5

PCB SCREW TERMINAL BLOCK

Download date : 2025-12-06



Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	9.5/2~24
Stripping Length [mm]	6~7
Screw/Torque(Max)[N.m]	M3/0.5
Operating temperature [°C]	-40~+105
Soldering temperature	260°C/5S
Pin dimensions [mm]	0.8*1.0
PCB Hole Diameter [mm]	Ø1.6

Dimensions

PCB opening diagram

