


WJ248-3.5
PCB SPRING TERMINAL BLOCK

Download date : 2025-10-22



PCB spring terminal block
Rated current: 10 A
Rated voltage: 300 V
Wire range: 26-16 AWG
Pitch: 3.5 mm
Mounting: Wave soldering

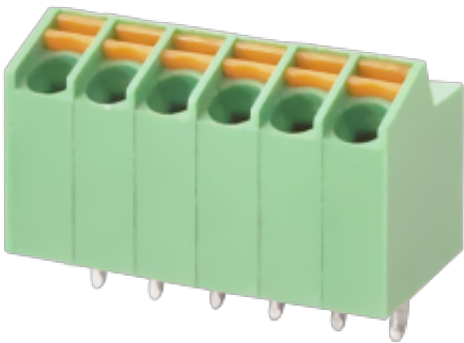

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	10	-	10
Wire Range [AWG]	26-16		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	160	200	400
Rated Current [A]	9	9	9
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.2-1.5		

Material

