


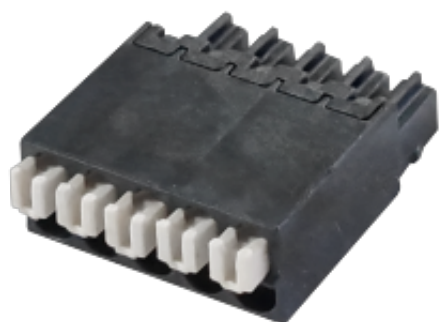

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	-
Rated Current [A]	5	-	-
Wire Range [AWG]	26-18		
Dielectric Voltage-Withstand	1.3KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	32	160	320
Rated Current [A]	6	6	6
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.14-0.5		

Material


Insulation Material	PA66
Flame relardant rating	UL94V-0

Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Pitch/Poles [mm]/[P]	2.54/2-24
Stripping Length [mm]	7-8
Screw/Torque(Max)[N.m]	-
Operating temperature [°C]	-40°C~+105°C
Soldering temperature	/
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/


Dimensions

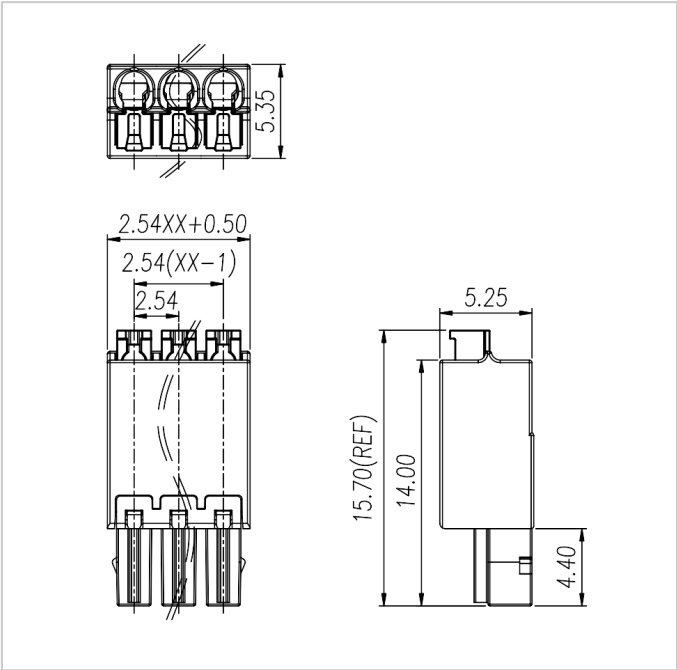


Accessories




[WJ15VD-THR-2.54](#)



[WJ15RD-THR-2.54](#)



[WJ15VDM-THR-2.54](#)



[WJ15RDM-THR-2.54](#)