



For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	600	600	-
Rated Current [A]	20	20	-
Wire Range [AWG]	30-12		
Dielectric Voltage-Withstand	2.2KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	1000	1000	1000
Rated Current [A]	16	16	16
Impulse withstand voltage [KV]	8	8	6
Conductor cross section[solid/flexible] [mm²]	0.2-2.5		

Material


Insulation Material	PA66
Flame relardant rating	UL94V-0

Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	7.62/2-12
Stripping Length [mm]	8
Screw/Torque(Max)[N.m]	M3/0.5
Operating temperature [°C]	-40°C~+105°C

Dimensions

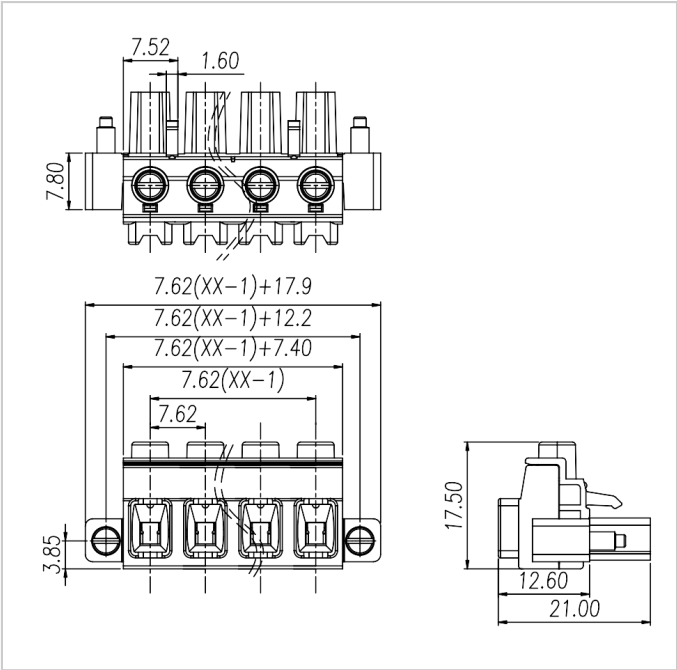

Accessories



[WJ2EDGVM-7.62](#)



[WJ2EDGRM-7.62](#)



[WJ2EDGKRN-7.62](#)