


GUV4-102

GUV Push-in terminal block

Download date : 2025-11-21

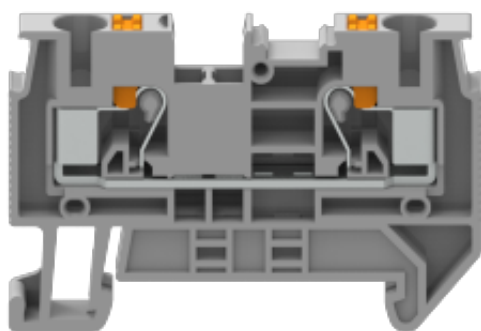

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	600	600	600
Rated Current [A]	30	30	5
Withstanding Voltage	2200V/1Min		
Wire Range	24-10AWG		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	800V
Rated Current [A]	32A
Impulse withstand voltage	8KV

Conductor cross section

Soild	0.2-6mm ²
Flexible	0.2-4mm ²
Flexible with ferrule	0.2-4mm ²

GUV4-102

GUV Push-in terminal block

Download date : 2025-11-21




Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Length/Height/Thickness [mm]	55.9/35.2/6.2
Connection Points	2
Stripping Length [mm]	10-12
Type of rail	DIN 35
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105

Dimensions

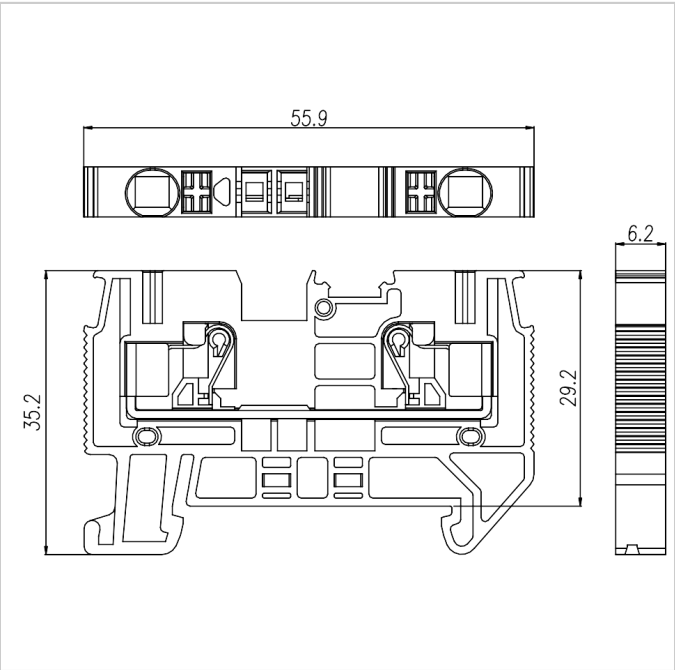


Accessories


GUV4-102

GUV Push-in terminal block


Download date : 2025-11-21



[FUVA4-XX](#)



[MUV4-10](#)



[PUV4-80](#)



[EB-35](#)



[EW-35](#)



[DUV4-102](#)



-

[DGS1-35x7.5W4.2x12](#)



-

[DGS1-35x7.5W5.2x15](#)




-

[DGS1-35x7.5W](#)




-

[DGL2-35x7.5A](#)



-

[DGL2-35x7.5B](#)



-

[DGL2-35x7.5C](#)



-

[DGL2-35x7.5D](#)