


GUV10-102

GUV Push-in terminal block

Download date : 2025-10-30

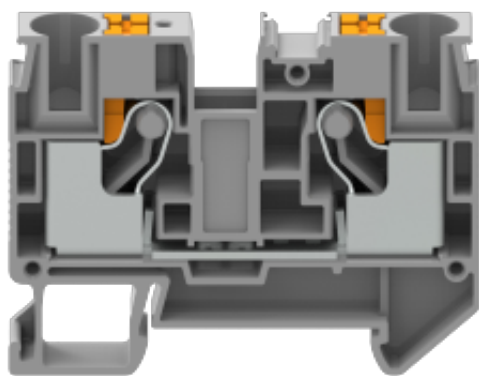

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	600	600	600
Rated Current [A]	60	60	5
Withstanding Voltage	2200V/1Min		
Wire Range	20-6AWG		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	1000V
Rated Current [A]	57A
Impulse withstand voltage	8KV

Conductor cross section

Soild	0.5-16mm ²
Flexible	0.5-10mm ²
Flexible with ferrule	0.5-10mm ²

GUV10-102

GUV Push-in terminal block

Download date : 2025-10-30




Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	67.9/49.7/10.2
Connection Points	2
Stripping Length [mm]	18
Type of rail	DIN 35
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105


Dimensions

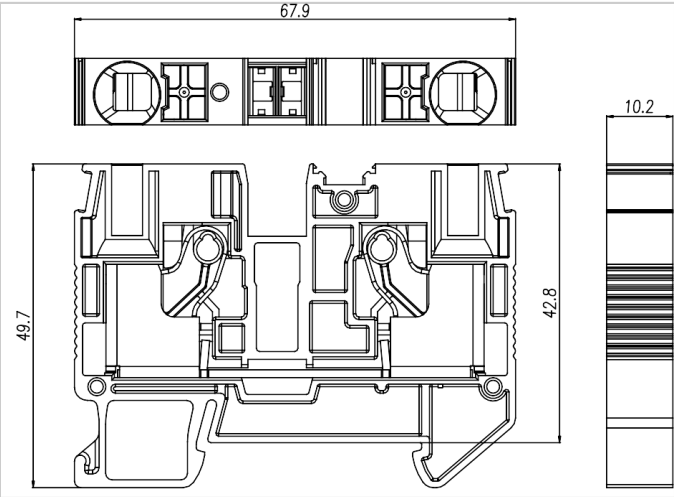


Accessories



[FUVA10-XX](#)



[MUV10-10](#)



[PUV10-48](#)



[EB-35](#)



[EW-35](#)



[DUV10-102](#)




[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)

[DGL2-35x7.5D](#)