


GUK35-102

GUK Universal combination terminal block

Download date : 2025-05-01

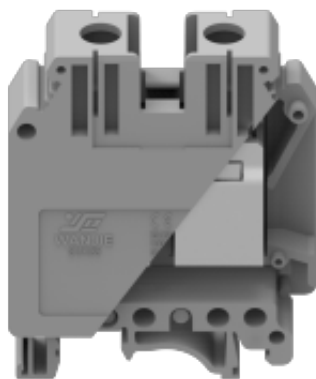

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	600	600	600
Rated Current [A]	150	150	5
Withstanding Voltage	2200V/1Min		
Wire Range	18-1/0AWG		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	1000V
Rated Current [A]	125A
Impulse withstand voltage	8KV

Conductor cross section

Soild	10-35mm ²
Flexible	10-35mm ²
Flexible with ferrule	10-35mm ²


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated


Other Data

Length/Height/Thickness [mm]	50.0/62.0/15.2
Connection Points	2
Stripping Length [mm]	16-17
Type of rail	DIN 35/32
Screw/Torque(Max)[N.m]	M6/3.2-3.7
Operating temperature [°C]	-40~+105


Dimensions

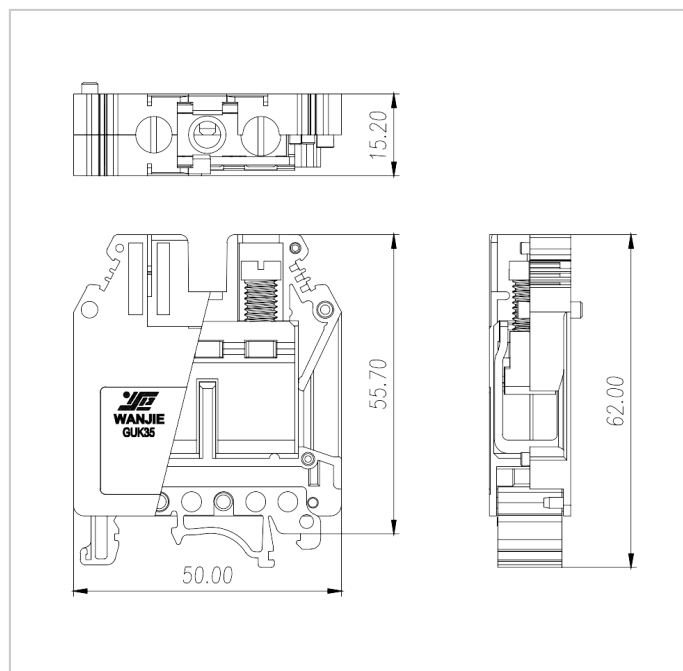

Accessories




[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[FUKB35-XX](#)



[MUV10-10](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)