


GUDK4-104

GUK Universal combination terminal block

Download date : 2025-12-05

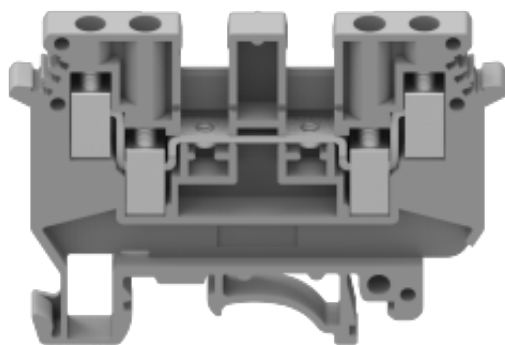

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	300	300	300
Rated Current [A]	30	30	5
Withstanding Voltage	1600V/1Min		
Wire Range	26-10AWG		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	630V
Rated Current [A]	32A
Impulse withstand voltage	8KV

Conductor cross section

Soild	0.2-6mm ²
Flexible	0.2-4mm ²
Flexible with ferrule	0.25-1.5mm ²

GUDK4-104

GUK Universal combination terminal block

Download date : 2025-12-05




Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Length/Height/Thickness [mm]	63.6/45.9/6.2
Connection Points	2
Stripping Length [mm]	8-9
Type of rail	DIN 35/32
Screw/Torque(Max)[N.m]	M3/0.6-0.8
Operating temperature [°C]	-40~+105

Dimensions

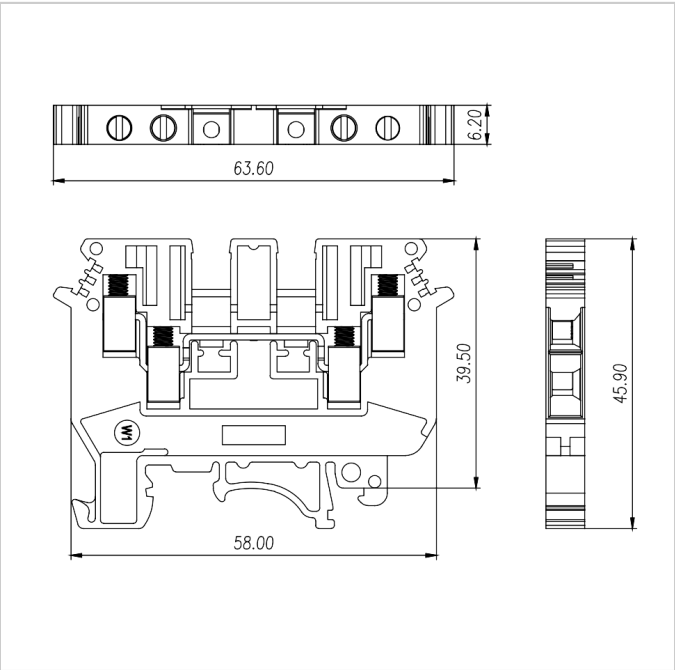

Accessories




[FUKB4-XX](#)




[MUV4-10](#)



[D-GUDK4-104](#)



[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)