GUV2.5-103-PE

GUV Push-in terminal block

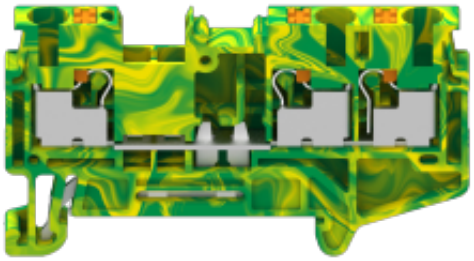

Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059)

Withstanding Voltage	2200V/1Min
Wire Range	26-12AWG

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage	8KV

Conductor cross section

Soild	0.2-4mm²
Flexible	0.2-2.5mm²
Flexible with ferrule	0.2-2.5mm²

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy

Plating of conductor surface	Sn plated

Other Data

Length/Height/Thickness [mm]	60.6/35.3/5.2
Connection Points	3
Stripping Length [mm]	8-10
Type of rail	DIN 35
Screw/Torque(Max)[N.m]	/
Operating temperature [℃]	-40~+105

Dimensions

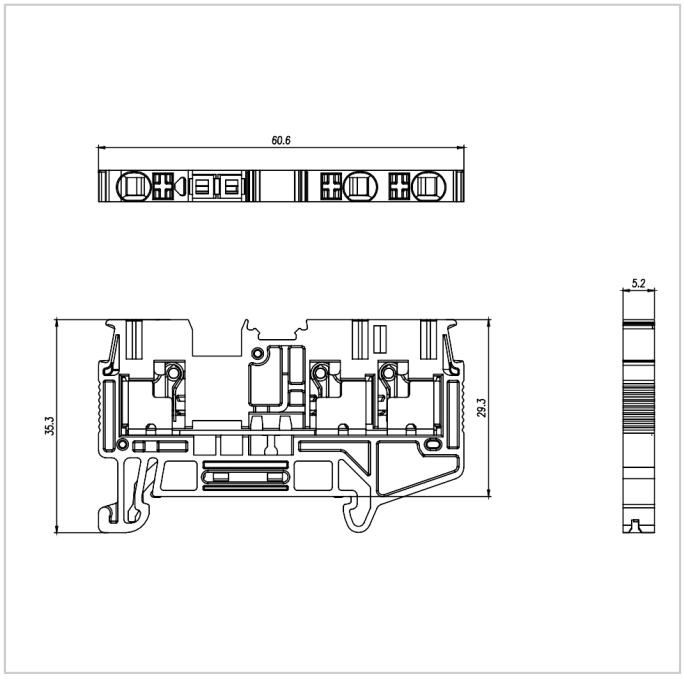

Accessories



MUV2.5-10



PUV2.5-96



FUVA2.5-XX



EB-35



EW-35

DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D

DUV2.5-103

DGS1-35x7.5W4.2x12

DGS1-35x7.5W5.2x15

DGS1-35x7.5W