


GUV4-202

GUV Push-in terminal block

Download date : 2025-10-22



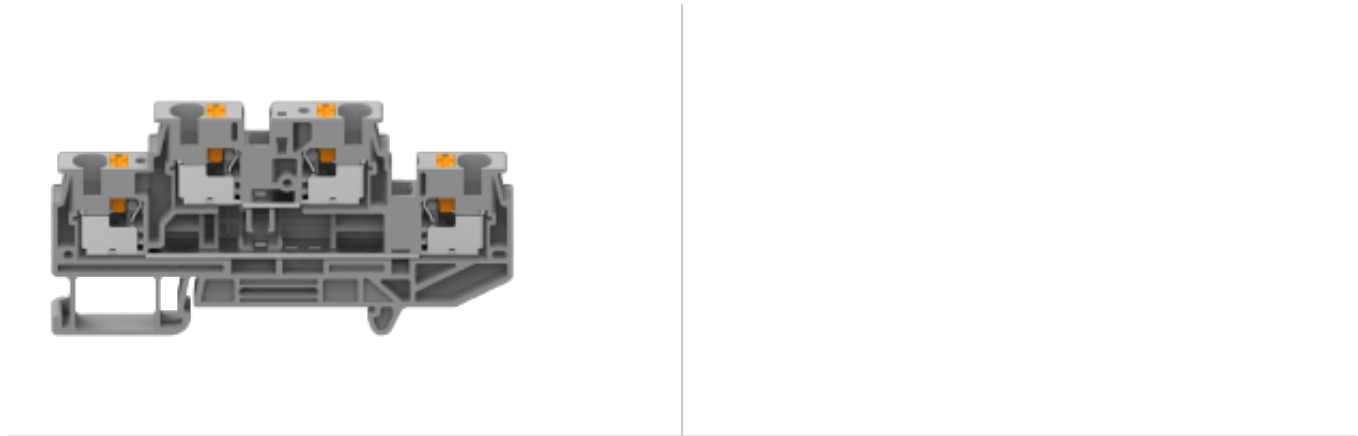

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	300	300	600
Rated Current [A]	28	28	5
Wire Range	24-10AWG		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	500V
Rated Current [A]	28A
Impulse withstand voltage	6KV

Conductor cross section

Soild	0.2-4mm²
Flexible	0.2-4mm²
Flexible with ferrule	0.2-4mm²

Material

GUV4-202

GUV Push-in terminal block

Download date : 2025-10-22




Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	83.8/45.9/6.2
Stripping Length [mm]	10-12
Approval	/

Dimensions

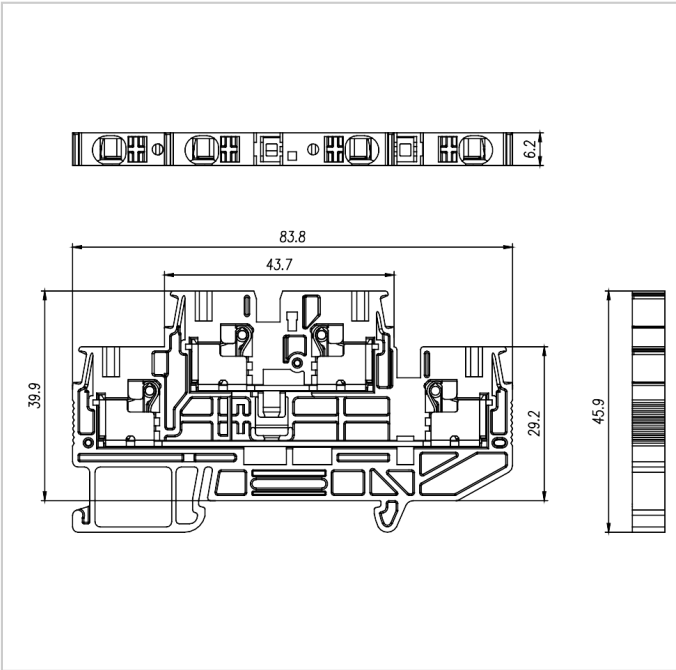


Accessories



[FUVA4-XX](#)




[DUV4-202](#)



[PUV4-80](#)



[EB-35](#)



[EW-35](#)



-

[DGS1-35x7.5W4.2x12](#)



-

[DGS1-35x7.5W5.2x15](#)



-

[DGS1-35x7.5W](#)



-

[DGL2-35x7.5A](#)



-

[DGL2-35x7.5B](#)



-

[DGL2-35x7.5C](#)



-

[DGL2-35x7.5D](#)