



For reference only!version1.0

CUL Technical Data (UL1059)

Wire Range	24-10AWG
------------	----------

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage	6KV

Conductor cross section

Soild	0.2-4mm ²
Flexible	0.2-4mm ²
Flexible with ferrule	0.2-4mm ²

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

GUV4-202-PE


GUV Push-in terminal block

Download date : 2025-12-07




Length/Height/Thickness [mm]	83.8/45.9/6.2
Stripping Length [mm]	10-12
Approval	/

Dimensions

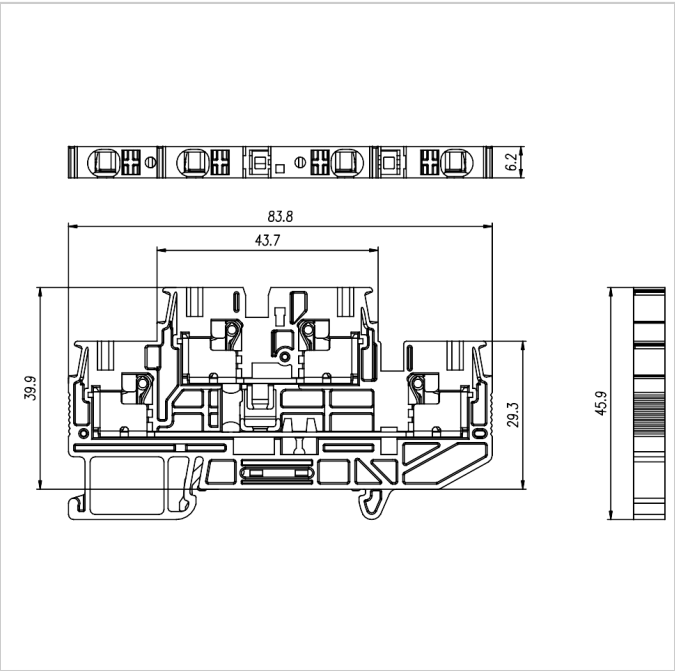


Accessories




[FUVA4-XX](#)




[DUV4-202](#)



[PUV4-80](#)



[EB-35](#)



[EW-35](#)



-

[DGS1-35x7.5W4.2x12](#)



-

[DGS1-35x7.5W5.2x15](#)




-

[DGS1-35x7.5W](#)




-

[DGL2-35x7.5A](#)



-

[DGL2-35x7.5B](#)



-

[DGL2-35x7.5C](#)



-

[DGL2-35x7.5D](#)