

Rated current: 40A

Rated voltage: 600V

Use wire diameter: 20-8AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	600	600	600
Rated Current [A]	40	40	5
Wire Range [AWG]	20~8		

IEC (60947-7-1)

Rated Voltage [V]	1000
Rated Current [A]	41
Soild [mm ²]	0.5-10.0
Flexible [mm ²]	0.5-6.0
Flexible with ferrule [mm ²]	0.5-6.0

GUV6-102

GUV Push-in terminal block

Download Date:2026-03-30



Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Length/Height/Thickness [mm]	57.8/42.3/8.2
Stripping Length [mm]	10-12

Dimensions

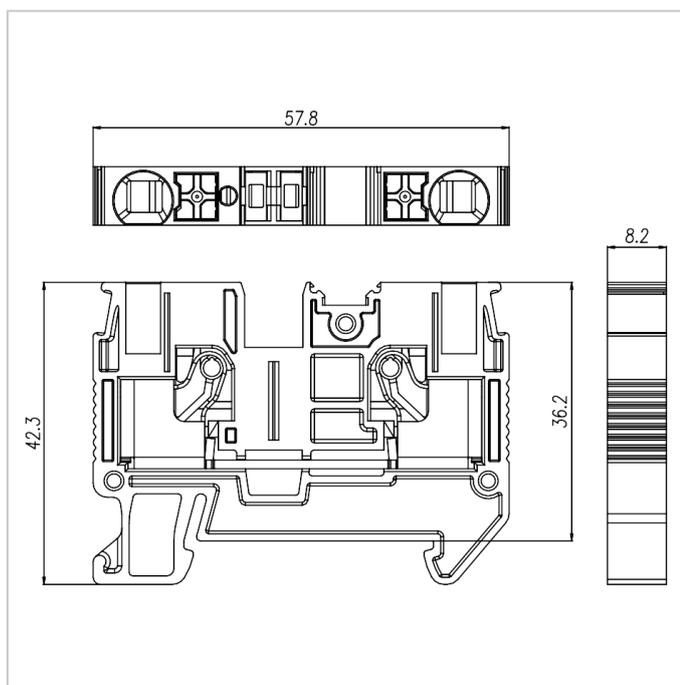

Accessories




DUV6-102



FUVA6-XX



MUV6-10



PUV6-56



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D