

Rated current: 15A

Rated voltage: 300V

Use wire diameter: 26-14AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

| Use Group | B | C | D |
|-------------------|---------|-----|-----|
| Rate Voltage [V] | 300 | 300 | 600 |
| Rated Current [A] | 15 | 15 | 5 |
| Wire Range [AWG] | 26 ~ 14 | | |

IEC (60947-7-1)

| | |
|--|---------|
| Rated Voltage [V] | 500 |
| Rated Current [A] | 17.5 |
| Soild [mm ²] | 0.2-1.5 |
| Flexible [mm ²] | 0.2-1.5 |
| Flexible with ferrule [mm ²] | 0.2-1.5 |

| | |
|--------------------------------|-----|
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 6 |


Material

| | |
|------------------------------|--------------|
| Insulation Material | PA66 |
| Flame retardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

Other Date

| | |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 48.7/35.4/4.2 |
| Stripping Length [mm] | 8-10 |

Dimensions

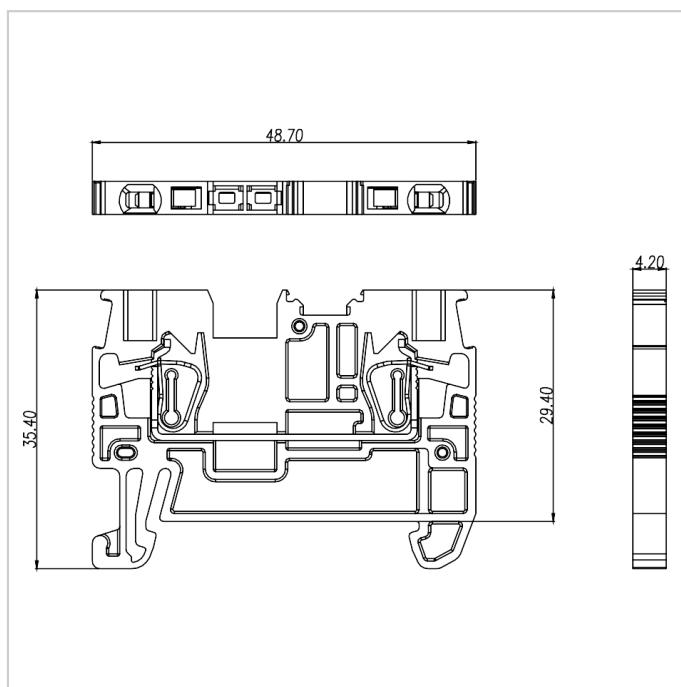

Accessories



DUV2.5-102




FUSA1.5-XX




MUS1.5-10



PUS1.5-120




EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D