


Use wire diameter: 24-6AWG

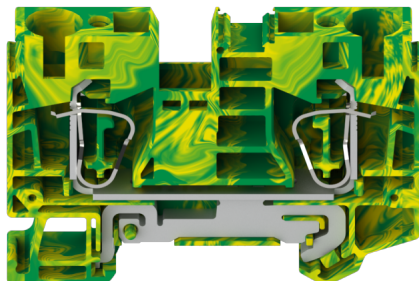

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

| | |
|------------------|------|
| Wire Range [AWG] | 24~6 |
|------------------|------|

IEC (60947-7-2)

| | |
|--|-----------|
| Soild [mm ²] | 0.2-16.0 |
| Flexible [mm ²] | 0.2-10.0 |
| Flexible with ferrule [mm ²] | 0.25-10.0 |
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |

Material


| | |
|---------------------|------|
| Insulation Material | PA66 |
|---------------------|------|

| | |
|------------------------------|--------------|
| Flame retardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

Other Date

| | |
|------------------------------|----------------|
| Length/Height/Thickness [mm] | 71.5/49.5/10.2 |
| Stripping Length [mm] | 18 |

Dimensions

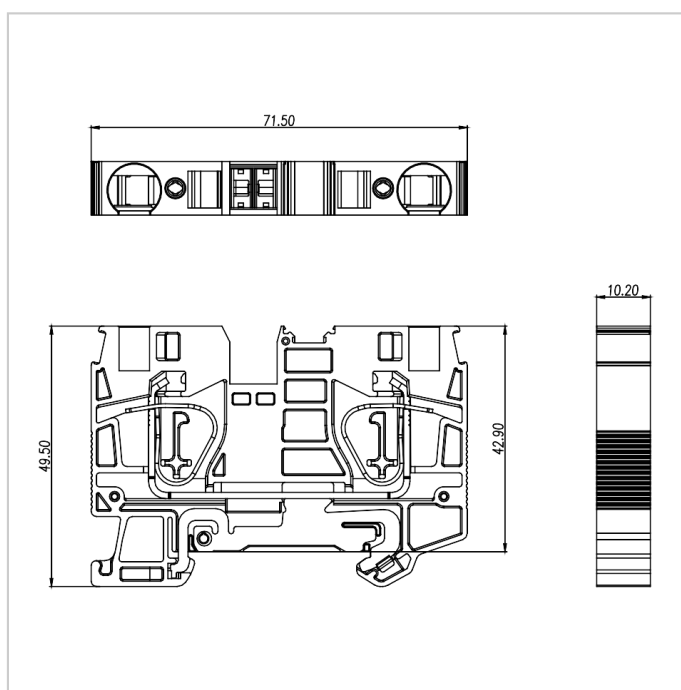


Accessories



FUVA10-XX



DUS10-102




MUV10-10



PUV10-48



EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D