Use wire diameter: 16-4AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Wire Range [AWG]	16-4

IEC (60947-7-2)

Soild [mm²]	1.5-25.0
Flexible [mm²]	1.5-16.0
Flexible with ferrule [mm²]	1.5-16.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material

Insulation Material	PA66

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Length/Height/Thickness [mm]	48.6/49.4/12.2
Stripping Length [mm]	12
Screw/Torque [N.m]	M5/2.5-3.0

Dimensions

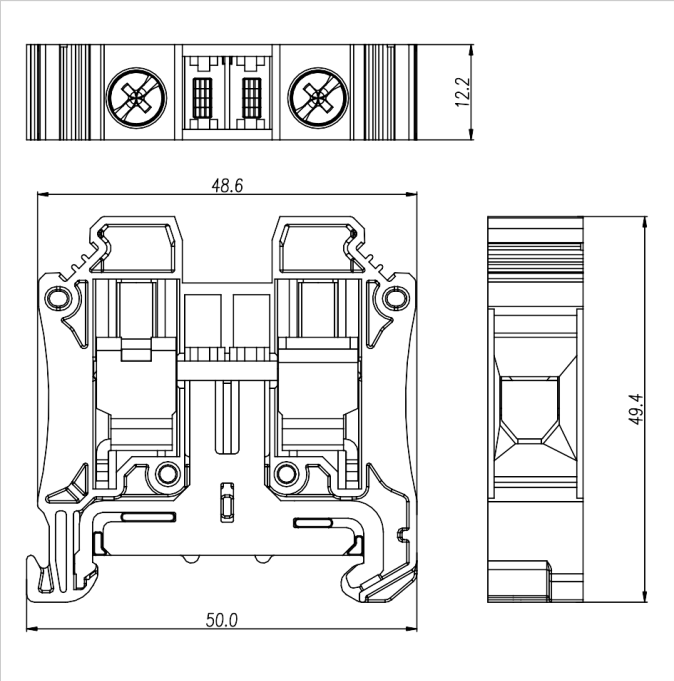

Accessories




DUT16-102

MUV10-10

EB-35

EW-35

EC-35



DGL2-35x7.5A

DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D