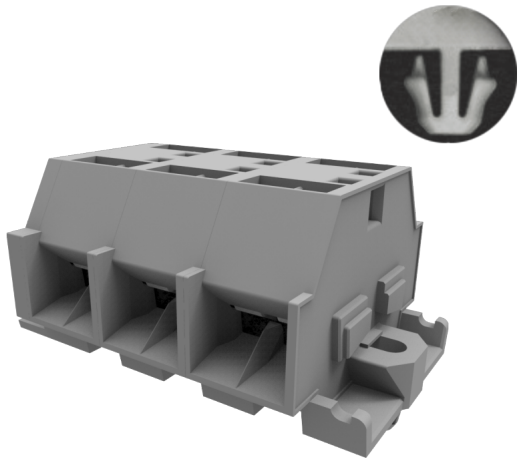


Rated current: 20A

Rated voltage: 300V

Use wire diameter: 28-12AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	300	300	600
Rated Current [A]	20	20	5
Wire Range [AWG]	28～12		

IEC

Rated Voltage [V]	630
Rated Current [A]	32
Soild [mm²]	0.2-4.0
Flexible [mm²]	0.2-4.0
Overvoltage Category	III

TEL: +86-574-63510583 / 63510582 E-mail: cjw@china-wj.com
CIXI WANJIE ELECTRONIC CO.,LTD.
www.china-wj.com

Contamination Class	3
Impulse withstand voltage [KV]	8

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Stripping Length [mm]	9-10

Dimensions

