

Use wire diameter: 18-2AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

Wire Range [AWG]	18-2
------------------	------

IEC ( 60947-7-2 )

Soild [mm <sup>2</sup> ]	10.0-35.0
Flexible [mm <sup>2</sup> ]	10.0-35.0
Flexible with ferrule [mm <sup>2</sup> ]	10.0-35.0
Overvoltage Category	III
Contamination Class	3

Material

Insulation Material	PA66
---------------------	------

# GUSLKG35-102-PE

GUK Universal combination terminal block

Download Date:2026-03-30




Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated

## Other Date

Length/Height/Thickness [mm]	50.0/61.8/15.2
Stripping Length [mm]	16-17
Screw/Torque [N.m]	M6/3.2-3.7

## Dimensions

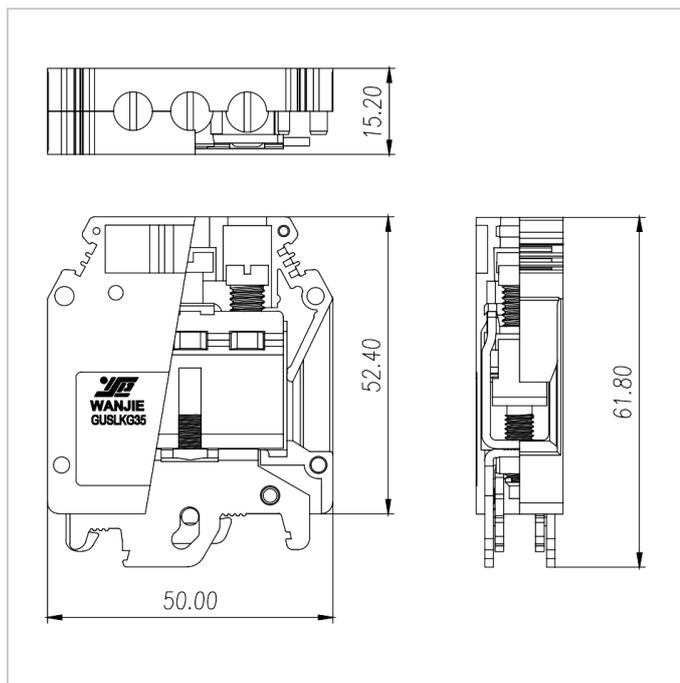

## Accessories



MUV10-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D