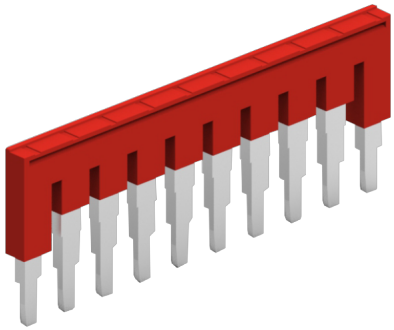



Rated current: 32A

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## Other Date

| | |
|---|---|
| Poles [P] | 2-10 |
| Rated Current [MAX][A] | 32 |
| Insulation Material | PA66 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

## Dimensions

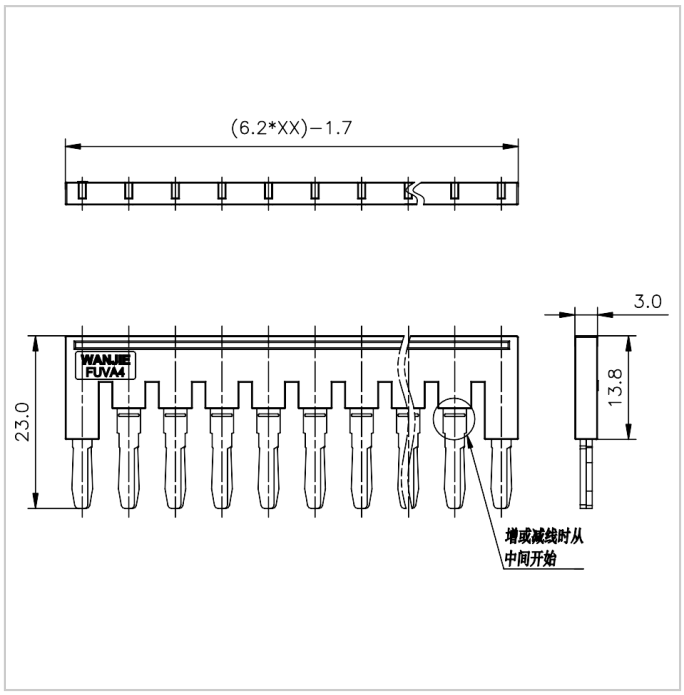
(6.2*XX)-1.7
3.0
13.8
23.0
WANJIE
FUVA4
增或减线时从
中间开始