



M5 Female Molded Cables, Angled

Rated current: 1A

Rated voltage: 60V

Use wire diameter: 26AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

### Connector Series: M5

Gender	Female
Coding	A
Locking Type	Fix Screw
Mounting Type	Angled
Part No	M05-A**-RA0-F02-BC*-XXX

### Technical Data

Standard	IEC61076-2-105
Ambient Temperatur	-25°C~+80°C
Insulation Resistance	≥100MΩ
Contact Resistance	≤5mΩ

IP Class	IP67
Mating Endurance	>100 Mating Cycles


### Material Data

Connector Carriers	PA
Connector Contacts	Copper Alloy With Gold Plated
Connector Nut/Screw	Copper Alloy With Nickel Plated
Shielding	Shielded /Unshielded
Connector Overmold	TPU

### Electrical Data & Mechanical Date

Contacts Pin [Pins]	3	4
Rated Current [A]	1	1
Voltage AC/DC [V]	60/60	60/60
Wire Range [AWG/mm <sup>2</sup> ]	26/0.14	26/0.14
Cable Jacket	PUR/PVC	

### Dimensions

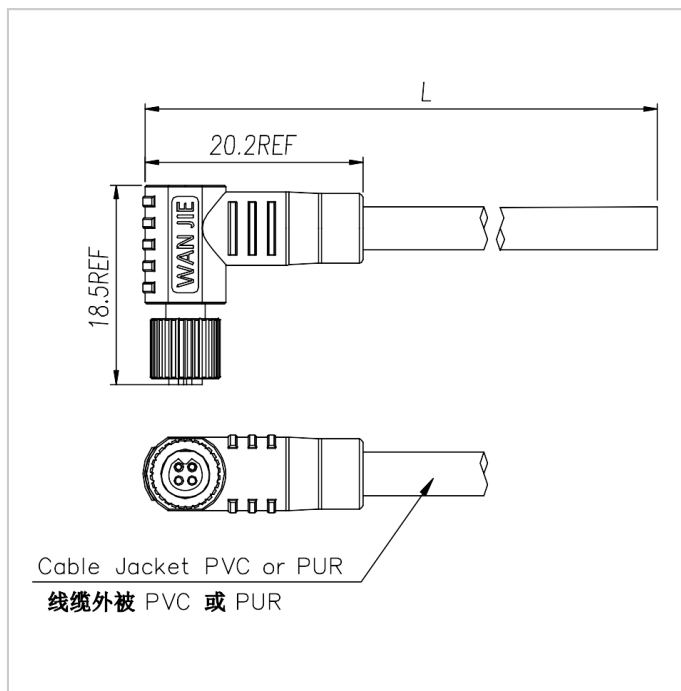

### Accessories



M05-A\*\*-ST0-M02-BC\*-XXX



M05-A\*\*-RA0-M02-BC\*-XXX



M05-A\*\*-ST0-M02-BQ1-XXX



M05-A\*\*-ST0-M02-BH1-XXX



M05-A\*\*-ST0-M02-BQ1



M05-A\*\*-ST0-M02-BH1



M05-A\*\*-ST0-M01-BQ1

M05-A\*\*-ST0-M01-BH1