



7/8" T Type Male-Female Molded With Cable



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

### Connector Series: 7/8"

Gender	Male to Female
Coding	A
Locking Type	Fix Screw
Mounting Type	T Type
Part No	M87-A**-ST0-MF2-BT*-XXX

### Technical Data

Ambient Temperatur	-25°C~+85°C
Insulation Resistance	≥100MΩ
Contact Resistance	≤5mΩ
IP Class	IP67

Mating Endurance

&gt;100 Mating Cycles


## Material Data

Connector Carriers	PA
Connector Contacts	Copper Alloy With Gold Plated
Connector Nut/Screw	Copper Alloy With Nickel Plated
Shielding	Unshielded
Seal/O-Ring	FKM
Connector Overmold	TPU

## Electrical Data & Mechanical Date

Contacts Pin [Pins]	2	3	4	5
Rated Current [A]	13	13	13	7
Voltage AC/DC [V]	300/300			
Wire Range AWG/mm <sup>2</sup>	18/1.0	18/1.0	18/1.0	20/0.5
Cable Jacket	PVC/PUR			

## Dimensions

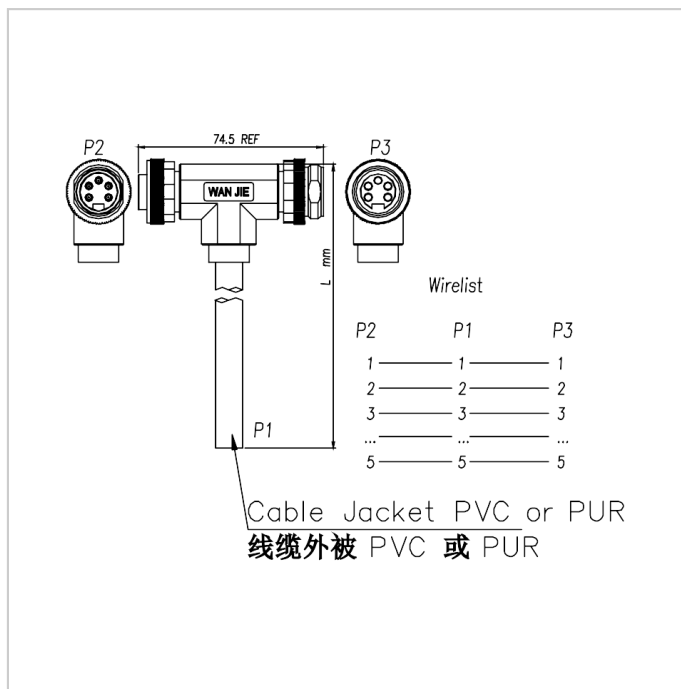

## Accessories



M87-A\*\*-ST0-F01-BQ2



M87-A\*\*-ST0-F01-BH\*



M87-A\*\*-ST0-F02-BQ2



M87-A\*\*-ST0-F02-BH\*



M87-A\*\*-ST0-F02-BQ2-XXX



M87-A\*\*-ST0-F02-BH\*-XXX



M87-A\*\*-ST0-F02-BC\*-XXX

M87-A\*\*-RA0-F02-BC\*-XXX