

Rated current: 15A

Rated voltage: 300V

Use wire diameter: 24-14AWG

spacing:5.0mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

### UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range [AWG]	24-14		
Dielectric Voltage-Withstand	1.6KV		

### IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	320	400	800
Rated Current [A]	16	16	16

Impulse withstand voltage [KV]	4	4	4
Conductor cross section [mm <sup>2</sup> ]	0.2-2.5		


### Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

### Other Date

Pitch/Poles [mm]/[P]	5.0/2-4
Stripping Length [mm]	10
Screw/Torque(Max)[N.m]	-
Operating temperature [°C]	-40 ~ +105

### Dimensions

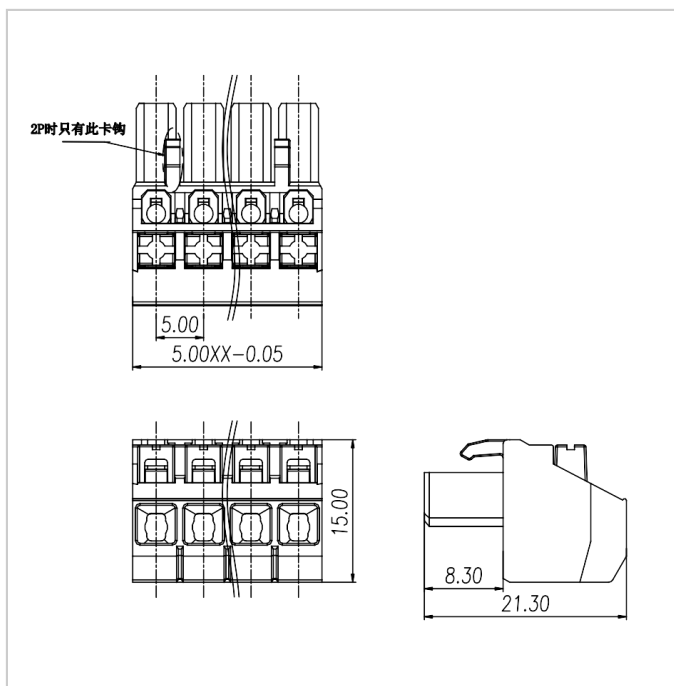

Accessories



WJ2EDGV-5.0



WJ2EDGR-5.0




WJ2EDGVC-5.0



WJ2EDGRC-5.0



WJ2EDGRR-5.0



WJ2EDGRRC-5.0



WJ2EDGV-THT-5.0



WJ2EDGVC-THT-5.0



WJ2EDGR-THT-5.0



WJ2EDGRC-THT-5.0



WJ2EDGLF-5.0



WJ2EDGRF-5.0



WJ2EDGLF-THR-5.0

WJ2EDGRF-THR-5.0

WJ2EDGVT-5.0



WJ2EDGRT-5.0



WJ2EDGVTC-5.0



WJ2EDGRTC-5.0



WJ2EDGVH-5.0



WJ2EDGRH-5.0



WJ2EDGL-5.0




WJ2EDGLC-5.0



WJ2EDGKDR-5.0

## Matching components



WJ2EDG-PWI