


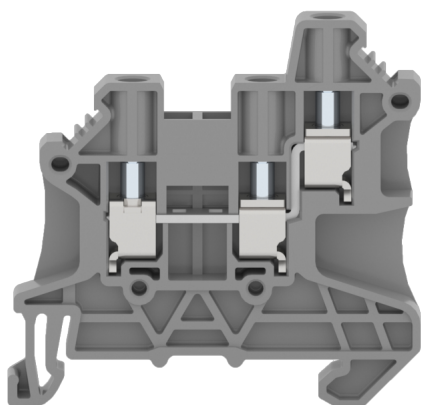

Rated current: 30A

Rated voltage: 600V

Use wire diameter: 26-10AWG

The catalog is for reference only. The actual
specifications are subject to the product
engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	600	600	600
Rated Current [A]	30	30	5
Wire Range [AWG]	26 ~ 10		

IEC (60947-7-1)

Rated Voltage [V]	1000
Rated Current [A]	32
Soild [mm²]	0.2-6.0
Flexible [mm²]	0.2-4.0
Flexible with ferrule [mm²]	0.25-4.0

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	50.0/47.7/6.2
Stripping Length [mm]	8-9
Screw/Torque [N.m]	M3.0/0.5-0.6

Dimensions

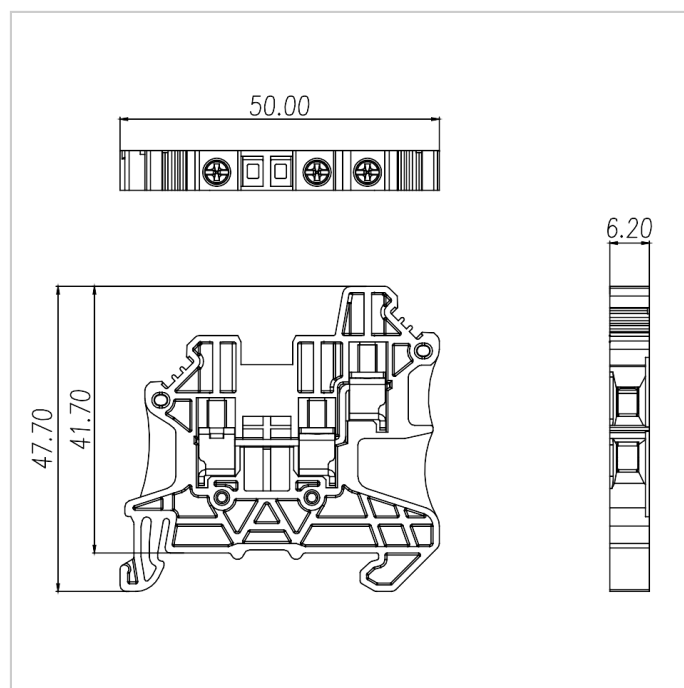

Accessories




FUVA4-XX



DUT2.5-103



MUV4-10



EB-35




EW-35




EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D