


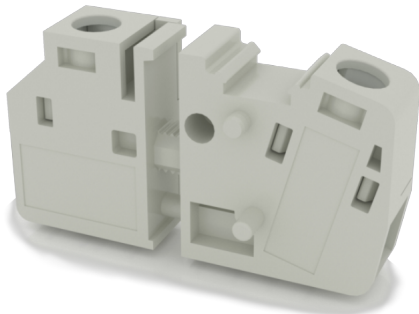

Through-wall type terminal block

Rated current: 30A

Rated voltage: 300V

Use wire diameter: 30-10AWG

spacing: /

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	300	300
Rated Current [A]	30	30	10
Wire Range [AWG]	30-10		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III
Contamination Class	3	2
Rated Voltage [V]	400	400
Rated Current [A]	41	41

Impulse withstand voltage [KV]	6	6
Conductor cross section [mm ²]	0.2-6.0	

Material


Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	8.1/XX=01P
Stripping Length [mm]	9
Screw/Torque(Max)[N.m]	M3/0.5
Operating temperature [°C]	-40 ~ +105

Dimensions

PCB hole diagram

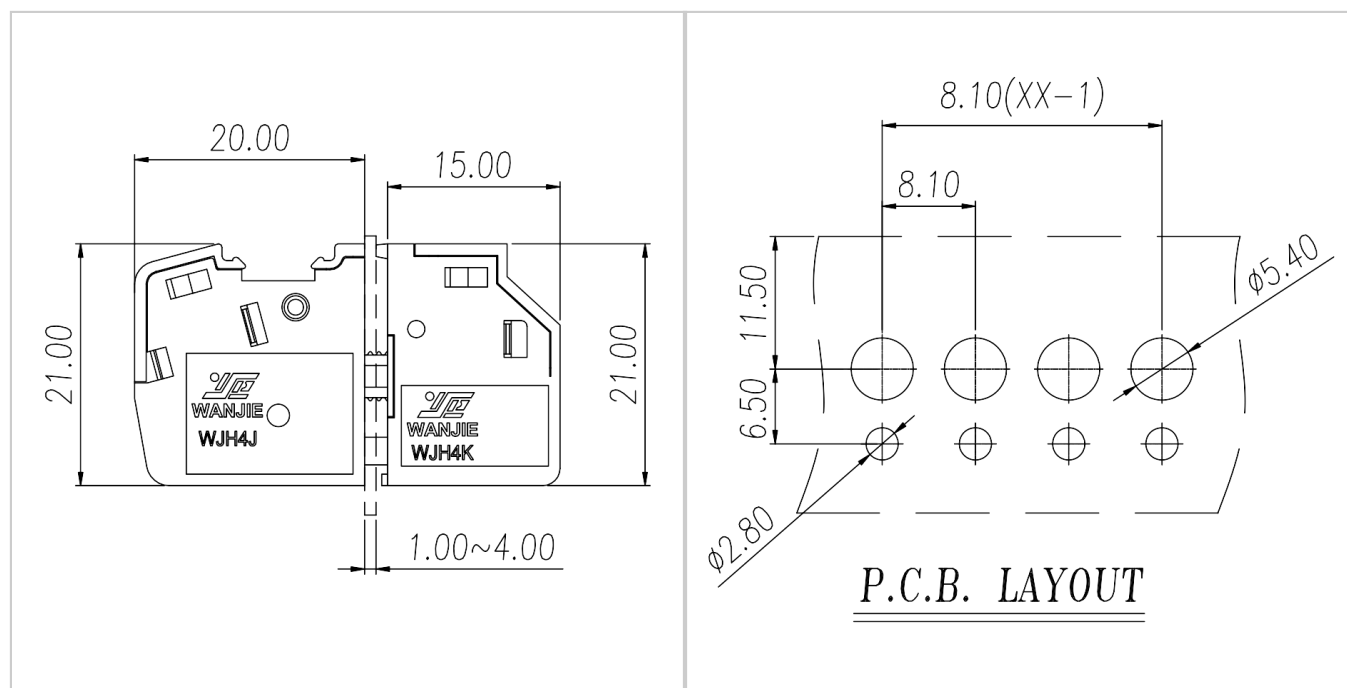

Accessories



MUV6-10