



Rated current: 5A  
 Rated voltage: 150V  
 Use wire diameter: 26-20AWG  
 spacing:2.54mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

### UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	-
Rated Current [A]	10	-	-
Wire Range [AWG]	26-20		
Dielectric Voltage-Withstand	1.3KV		

### IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	100	160	320
Rated Current [A]	5	5	5

Impulse withstand voltage [KV]	1.5	2.5	2.5
Conductor cross section [mm <sup>2</sup> ]	0.2-0.5		


### Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


### Other Date

Pitch/Poles [mm]/[P]	2.54/2-24
Stripping Length [mm]	5-6
Screw/Torque(Max)[N.m]	M1.6/0.1
Operating temperature [°C]	-40 ~ +105

### Dimensions

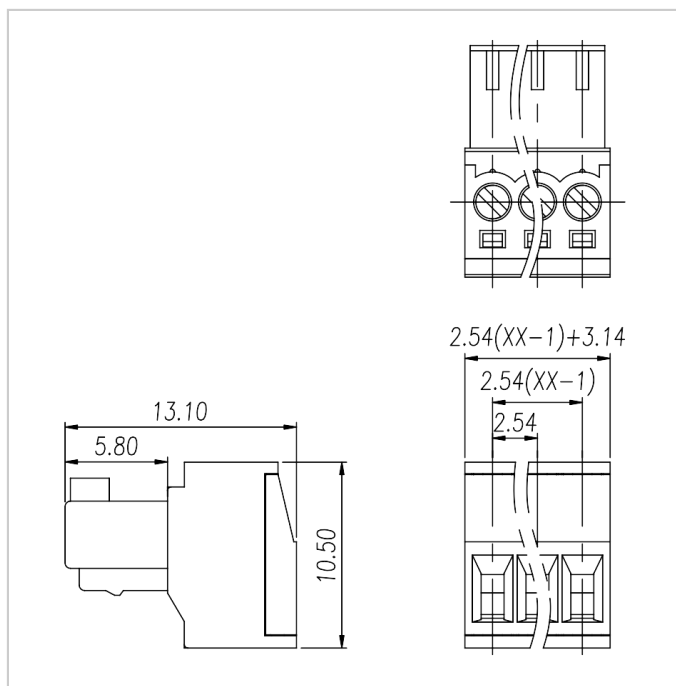

## Accessories



WJ15EDGVC-2.54



WJ15EDGRC-2.54