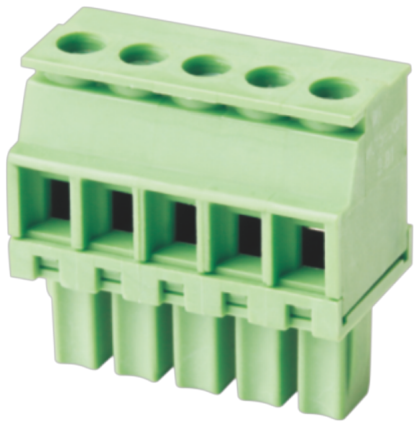


Rated current: 8A

Rated voltage: 300V

Use wire diameter: 28-16AWG

spacing:3.81mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL/CUL

| | | | |
|---|---|---|---|
| Use Group | B | C | D |
| Rate Voltage [V] | 300 | - | 300 |
| Rated Current [A] | 8 | - | 8 |
| Wire Range [AWG] | 28-16 | | |
| Dielectric Voltage-Withstand | 1.6KV | | |

## IEC

| | | | |
|---|---|---|---|
| Overvoltage Category | III | III | II |
| Contamination Class | 3 | 2 | 2 |
| Rated Voltage [V] | 160 | 160 | 320 |
| Rated Current [A] | 8 | 8 | 8 |

| | | | |
|---|---|---|---|
| Impulse withstand voltage [KV] | 2.5 | 2.5 | 2.5 |
| Conductor cross section [mm²] | 0.2-1.5 | | |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

## Other Date

| | |
|---|---|
| Pitch/Poles [mm]/[P] | 3.81/2-24 |
| Stripping Length [mm] | 6-7 |
| Screw/Torque(Max)[N.m] | M2/0.2 |
| Operating temperature [℃] | -40～+105 |

## Dimensions

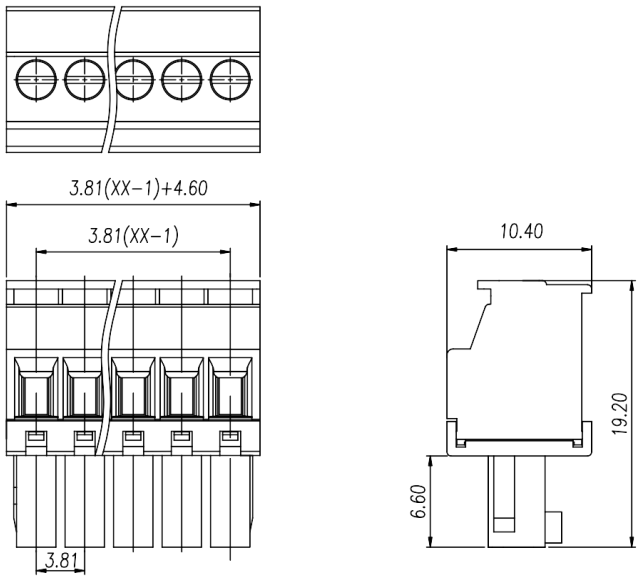


## Accessories



WJ15EDGVC-THR-3.81



WJ15EDGRC-THR-3.81




WJ15EDGKR-3.81



WJ15EDGGB-3.81



WJ15EDGVC-3.81



WJ15EDGRC-3.81



WJ15EDGLC-3.81



WJ15EDGVF-3.81



WJ15EDGVT-3.81



WJ15EDGRT-3.81



WJ15EDGVH-3.81



WJ15EDGRH-3.81