

Rated current: 35A

Rated voltage: 600V

Use wire diameter: 24-8AWG

spacing:7.62mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

### UL/CUL

| Use Group                    | B     | C   | D |
|------------------------------|-------|-----|---|
| Rate Voltage [V]             | 600   | 600 | - |
| Rated Current [A]            | 35    | 35  | - |
| Wire Range [AWG]             | 24-8  |     |   |
| Dielectric Voltage-Withstand | 2.2KV |     |   |

### IEC

| Overvoltage Category | III  | III  | II   |
|----------------------|------|------|------|
| Contamination Class  | 3    | 2    | 2    |
| Rated Voltage [V]    | 1000 | 1000 | 1000 |
| Rated Current [A]    | 41   | 41   | 41   |

|  |         |   |   |
|--|---------|---|---|
| Impulse withstand voltage [KV]             | 8       | 8 | 6 |
| Conductor cross section [mm <sup>2</sup> ] | 0.2-6.0 |   |   |


### Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

### Other Date

|                            |            |
|----------------------------|------------|
| Pitch/Poles [mm]/[P]       | 7.62/2-12  |
| Stripping Length [mm]      | 14-15      |
| Screw/Torque(Max)[N.m]     | -          |
| Operating temperature [°C] | -40 ~ +105 |

### Dimensions

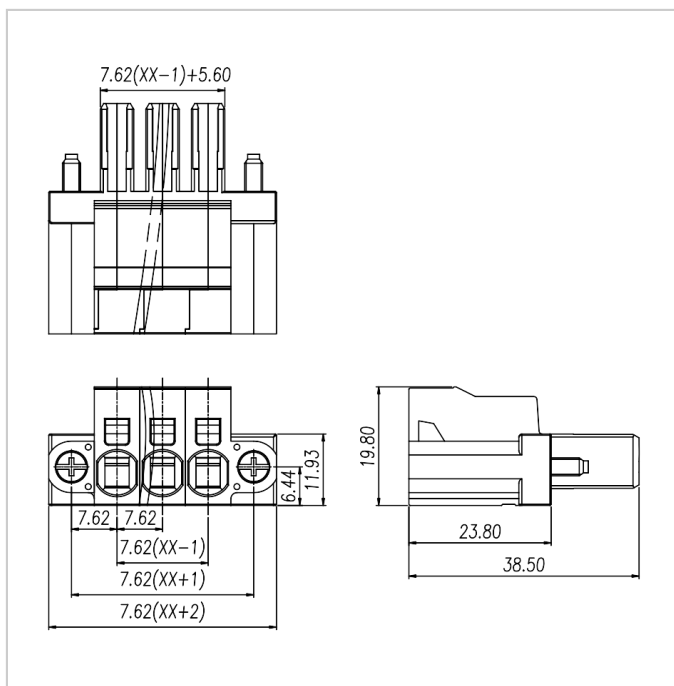

Accessories



WJ3EDGKRN-7.62



WJ3EDGKRP-7.62



WJ3EDGVM-7.62



WJ3EDGVZM-7.62



WJ3EDGRM-7.62



WJ3EDGRZM-7.62



WJ3EDGVHM-7.62



WJ3EDGRHM-7.62



WJ3EDGRRHM-7.62