



Rated current: 15A  
Rated voltage: 300V  
Use wire diameter: 28-12AWG  
spacing:7.5mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

### UL/CUL

| Use Group                    | B       | C | D   |
|------------------------------|---------|---|-----|
| Rate Voltage [V]             | 300     | - | 300 |
| Rated Current [A]            | 15      | - | 10  |
| Wire Range [AWG]             | 28 ~ 12 |   |     |
| Dielectric Voltage-Withstand | 1.6KV   |   |     |

### IEC

| Overvoltage Category | III | III | II  |
|----------------------|-----|-----|-----|
| Contamination Class  | 3   | 2   | 2   |
| Rated Voltage [V]    | 320 | 320 | 630 |
| Rated Current [A]    | 16  | 16  | 16  |

|  |          |   |   |
|--|----------|---|---|
| Impulse withstand voltage [KV]             | 6        | 6 | 6 |
| Conductor cross section [mm <sup>2</sup> ] | 0.25-2.5 |   |   |


### Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

### Other Date

|                            |            |
|----------------------------|------------|
| Pitch/Poles [mm]/[P]       | 7.5/2-24   |
| Stripping Length [mm]      | 8-9        |
| Screw/Torque(Max)[N.m]     | -          |
| Operating temperature [°C] | -40 ~ +105 |

### Dimensions

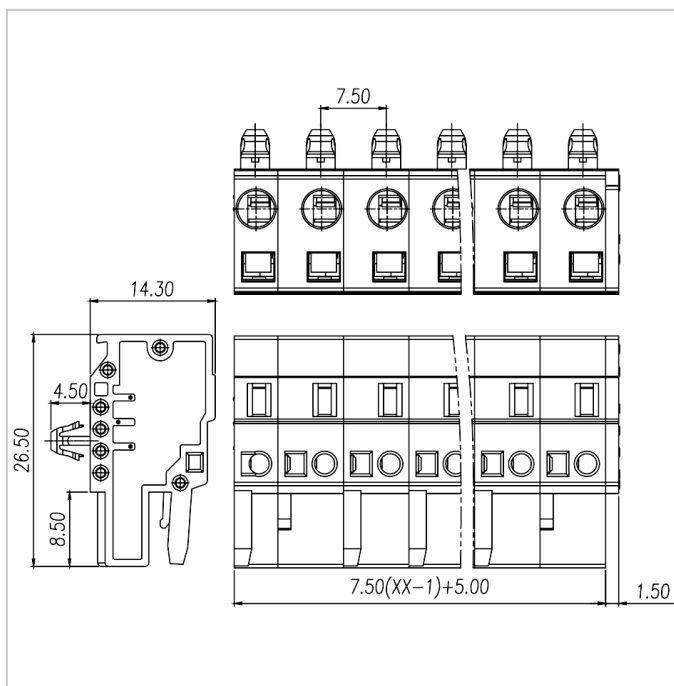

## Accessories



WJ0602-01XX



WJ0602-02XX



WJ0602-03XX



WJ0602-04XX



WJ0603-01XX



WJ0603-02XX



WJ0603-03XX