

Rated current: 4A  
Rated voltage: 150V  
spacing:2.5mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

| Use Group                    | B   | C     | D   |
|------------------------------|-----|-------|-----|
| Rate Voltage [V]             | 150 | -     | 150 |
| Rated Current [A]            | 4   | -     | 4   |
| Wire Range [AWG]             |     | -     |     |
| Dielectric Voltage-Withstand |     | 1.3KV |     |

IEC

| Overvoltage Category | III | III | II  |
|----------------------|-----|-----|-----|
| Contamination Class  | 3   | 2   | 2   |
| Rated Voltage [V]    | 80  | 160 | 320 |
| Rated Current [A]    | 6   | 6   | 6   |

|  |     |     |     |
|--|-----|-----|-----|
| Impulse withstand voltage [KV]             | 2.5 | 2.5 | 2.5 |
| Conductor cross section [mm <sup>2</sup> ] | -   |     |     |

### Material


|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

### Other Data

|                            |                |
|----------------------------|----------------|
| Pitch/Poles [mm]/[P]       | 2.5/2-12       |
| Stripping Length [mm]      | -              |
| Screw/Torque(Max)[N.m]     | -              |
| Operating temperature [°C] | -40 ~ +105     |
| Soldering method           | Wave soldering |
| Pin dimensions [mm]        | 0.8*0.8        |
| PCB Hole Diameter [mm]     | Ø1.4           |

### Dimensions

### PCB hole diagram

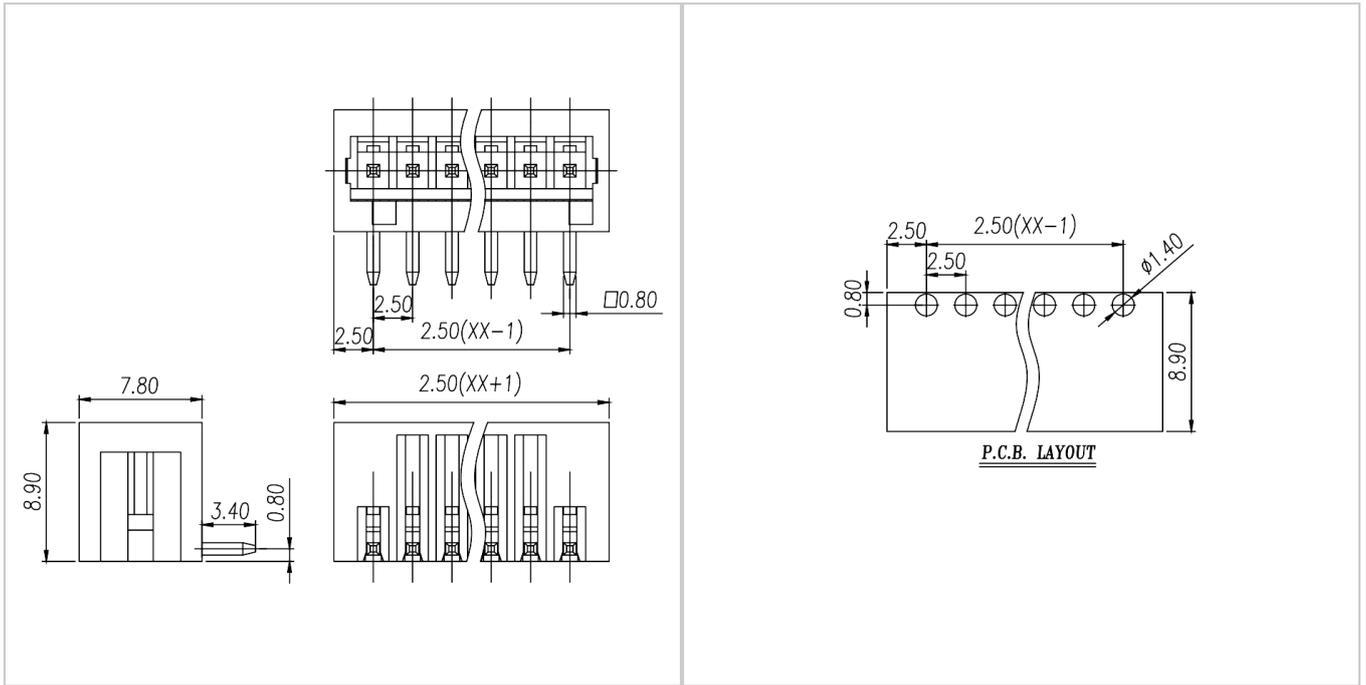

### Accessories



WJ0101-01XX



WJ0101-02XX