


使用线径: 26-12AWG

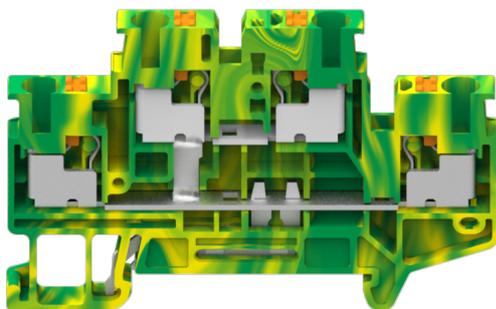

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL (1059)

| | |
|-----------------------|---------|
| 接线范围 Wire Range [AWG] | 26 ~ 12 |
|-----------------------|---------|

技术参数-IEC (60947-7-1)


| | |
|---|---------|
| 单芯 Solid [mm ²] | 0.2-4.0 |
| 柔性导线 Flexible [mm ²] | 0.2-2.5 |
| 柔性导线带冷压头 Flexible with ferrule [mm ²] | 0.2-2.5 |
| 过电压类别 Overvoltage Category | III |
| 污染等级 Contamination Class | 3 |
| 额定冲击电压 Impulse withstand voltage [KV] | 6 |

材料 Material

| | |
|-----------------------------|---------|
| 绝缘材料 Insulation Material | PA66 |
| 阻燃等级 Flame retardant rating | UL94V-0 |

| | |
|-------------------------------------|---------------|
| 导体材料 Conductor Material | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated |
| 一般参数 Other Date | |
| 长/高/厚 Length/Height/Thickness [mm] | 68.2/45.9/5.2 |
| 剥线长度 Stripping Length [mm] | 8-10 |

尺寸图

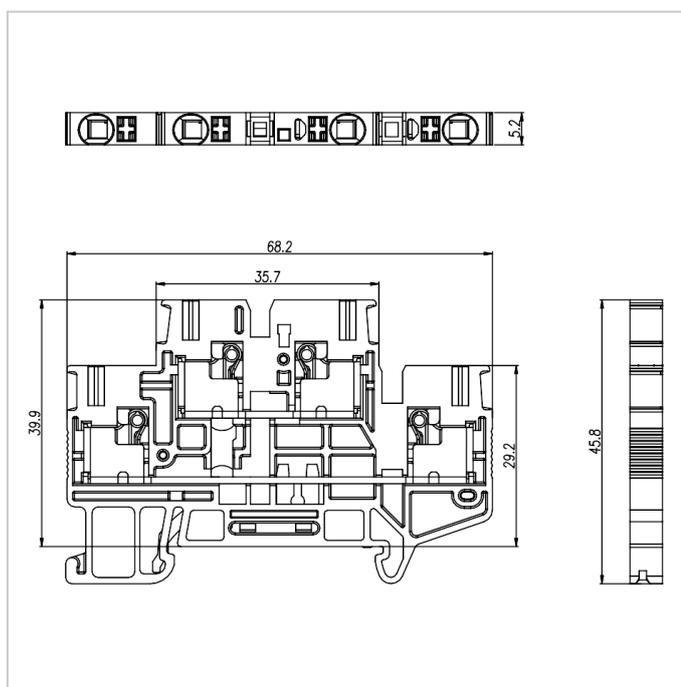


适配产品



FUVA2.5-XX



DUV2.5-202



PUV2.5-96



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D