

额定电流: 85A

额定电压: 600V

使用线径: 16-4AWG

目录仅供参考，实际规格依产品工程图为准 版本1.0

### 技术数据-UL ( 1059 )

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	600	600	600
额定电流 Rated Current [A]	85	85	5
接线范围 Wire Range [AWG]	14-3		

### 技术参数-IEC ( 60947-7-1 )

额定电压 Rated Voltage [V]	1000
额定电流 Rated Current [A]	76
单芯 Solid [mm <sup>2</sup> ]	1.5-25.0
柔性导线 Flexible [mm <sup>2</sup> ]	1.5-16.0
柔性导线带冷压头 Flexible with ferrule [mm <sup>2</sup> ]	1.5-16.0
过电压类别 Overvoltage Category	III

污染等级 Contamination Class	3
额定冲击电压 Impulse withstand voltage [KV]	8


### 材料 Material

绝缘材料 Insulation Material	PA66
阻燃等级 Flame retardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

### 一般参数 Other Date

长/高/厚 Length/Height/Thickness [mm]	48.6/49.4/12.2
剥线长度 Stripping Length [mm]	12
螺丝/扭矩 Screw/Torque [N.m]	M5/2.0-2.5

### 尺寸图

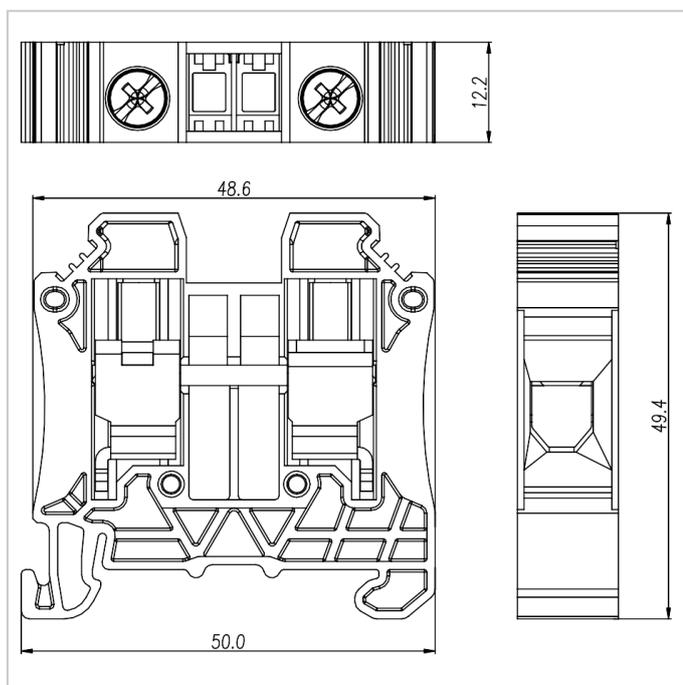

### 适配产品



DUT16-102



MUV10-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D