

插拔式接线端子

额定电流: 25A

额定电压: 300V

使用线径: -

间距:6.35mm

安装: 回流焊

目录仅供参考，实际规格依产品工程图为准 版本1.0

## 技术数据-UL/CUL

| 等级 Use Group                     | B     | C   | D   | F   |
|----------------------------------|-------|-----|-----|-----|
| 额定电压 Rate Voltage [V]            | 300   | 300 | 600 | 600 |
| 额定电流 Rated Current [A]           | 25    | 25  | 5   | 25  |
| 接线范围 Wire Range [AWG]            | -     |     |     |     |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV |     |     |     |

## 技术参数-IEC

| 过电压类别 Overvoltage Category            | III | III | II   |
|---------------------------------------|-----|-----|------|
| 污染等级 Contamination Class              | 3   | 2   | 2    |
| 额定电压 Rated Voltage [V]                | 630 | 800 | 1000 |
| 额定电流 Rated Current [A]                | 25  | 25  | 25   |
| 额定冲击电压 Impulse withstand voltage [KV] | 6   | 6   | 6    |

导线截面积[硬/柔] Conductor cross section [mm<sup>2</sup>]

-

## 材料 Material


|                                     |                           |
|-------------------------------------|---------------------------|
| 绝缘材料 Insulation Material            | HIGH-TEMPERATURE PLASTICS |
| 阻燃等级 Flame retardant rating         | UL94V-0                   |
| 导体材料 Conductor Material             | Copper alloy              |
| 导体表面镀层 Plating of conductor surface | Sn plated                 |

## 一般参数 Other Date

|                                 |                  |
|---------------------------------|------------------|
| 间距/极数 Pitch/Poles [mm]/[P]      | 6.35/02-20P      |
| 剥线长度 Stripping Length [mm]      | -                |
| 引针尺寸 Pin Dimensions [mm]        | 1.2*1.0          |
| 工作温度 Operating temperature [°C] | -40 ~ +130       |
| 焊接方式 Soldering method           | Reflow Soldering |

## 尺寸图

## PCB开孔图

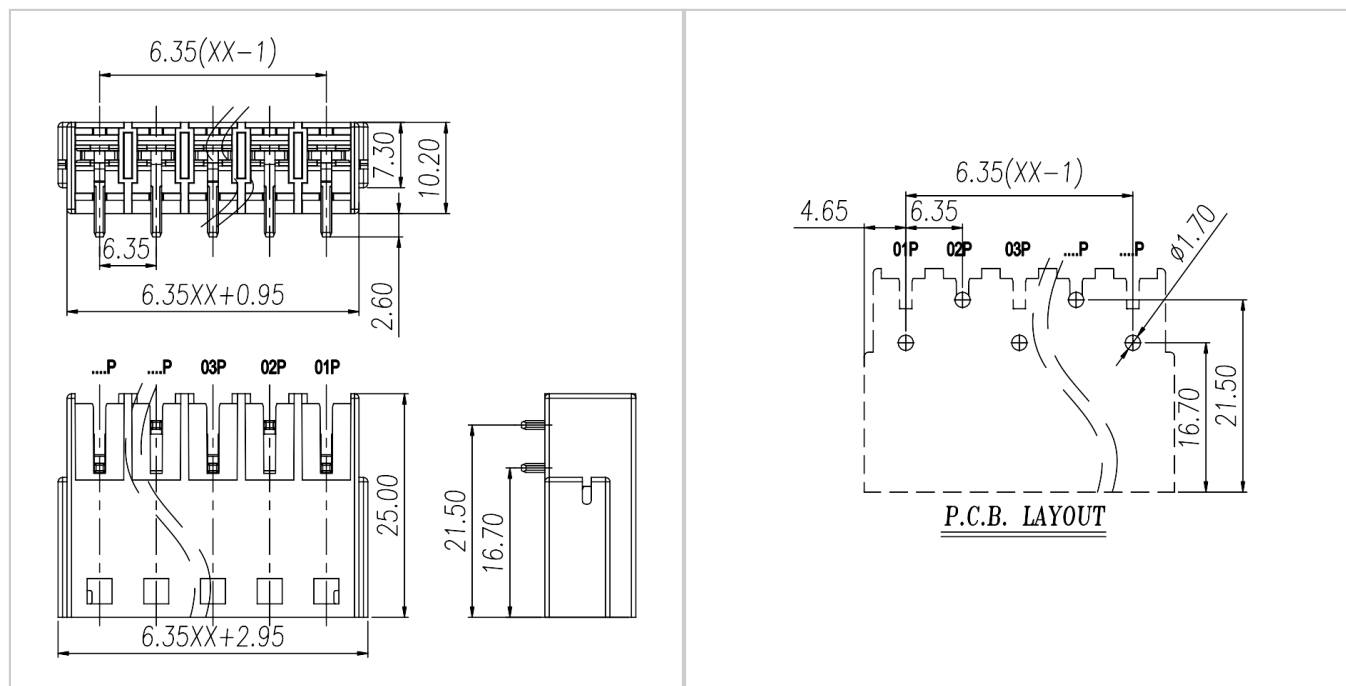

适配产品



WJ9KDG-6.35