


WJ15EDGVHSM-THR-2.54
PLUG-IN TERMINAL BLOCK

Download date : 2024-05-07



PCB connector
Rated current: 5 A
Rated voltage: 150 V
Pitch: 2.54 mm
Mounting: Reflow soldering

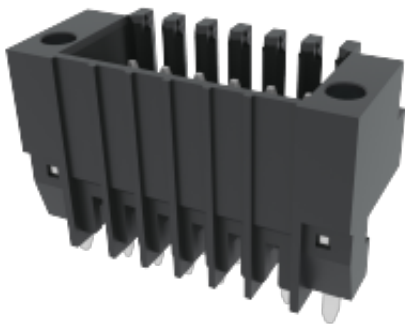

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	-
Rated Current [A]	5	-	-
Wire Range [AWG]	-		
Dielectric Voltage-Withstand	1.3KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	80	160	320
Rated Current [A]	6	6	6
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	-		

Material

Insulation Material	LCP
---------------------	-----



[WJ15EDGKNHBM-2.54](#)



[WJ15EDGKNHBG-2.54](#)